




# HR12-32WB

## Specification

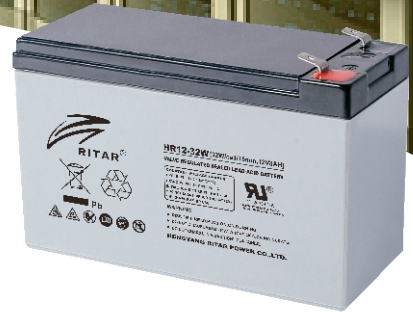


The HR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids and specially designed active material the HR series is with lower I.R, lower self discharge rate, high power, and longer service life performance. Generally the HR series offers 30% more power output than the standard range. Suitable for high power standby and cycling situation, such as UPS, datacenter, electric tools et al.

Cells Per Unit	6
Voltage Per Unit	12
Capacity	32W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 2.35 Kg (Tolerance ±4.0%)
Internal Resistance	Approx. 18 mΩ
Terminal	F2
Max. Discharge Current	75A (5 sec)
Short Circuit Current	415A
Design Life	Could Reach 8 years
Recommended Maximum Charging Current	2.25 A
Reference Capacity	C10 7.1AH C20 7.5AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C
Cycle Use Voltage	14.6 V~14.8 V @ 25°C
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Constainer Material	A.B.S. UL94-HB, UL94-V0 Optional.



## Dimensions

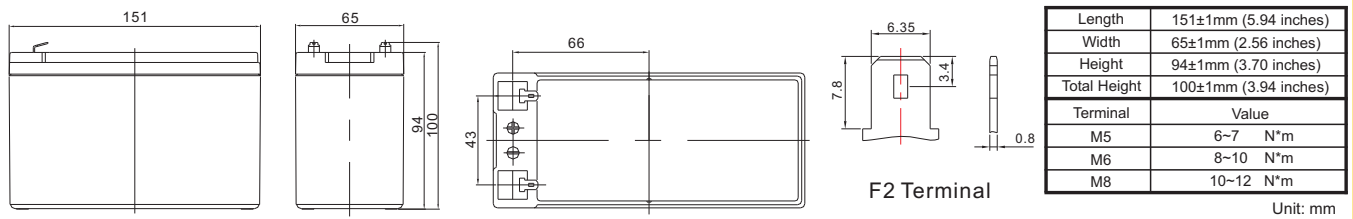

### Constant Current Discharge Characteristics : A (25°C)

F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	34.93	30.70	25.79	22.99	17.99	14.56	10.66	6.216	4.530
1.67V	32.32	28.40	24.19	21.57	17.05	13.58	10.16	5.923	4.313
1.70V	30.98	27.22	23.34	20.79	16.52	13.06	9.873	5.753	4.183
1.75V	29.26	25.71	22.17	19.52	15.75	12.70	9.595	5.659	4.089
1.80V	27.52	24.18	21.00	18.24	14.96	12.33	9.302	5.547	3.990
1.85V	25.68	22.57	19.75	16.91	14.11	11.90	8.958	5.414	3.871

### Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	63.3	55.6	47.4	42.5	33.5	26.8	19.6	11.5	8.4
1.67V	59.1	51.9	44.9	40.3	32.0	25.2	18.9	11.1	8.1
1.70V	57.3	50.4	43.8	39.3	31.4	24.5	18.6	10.9	7.9
1.75V	54.8	48.2	42.2	37.3	30.3	24.2	18.3	10.8	7.9
1.80V	52.3	46.0	40.5	35.4	29.2	23.8	18.0	10.8	7.8
1.85V	49.8	43.8	38.9	33.5	28.1	23.4	17.7	10.7	7.7

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


# HR12-32WB




## Discharge Characteristics Curve

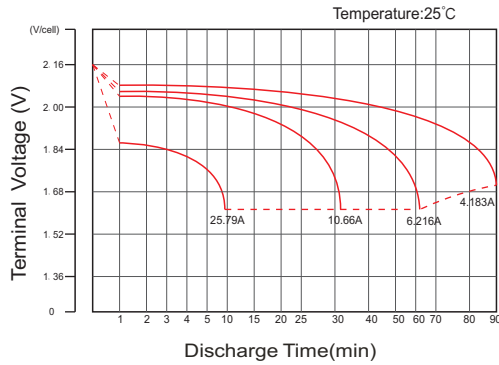


## Charge Characteristic Curve For Standby Use

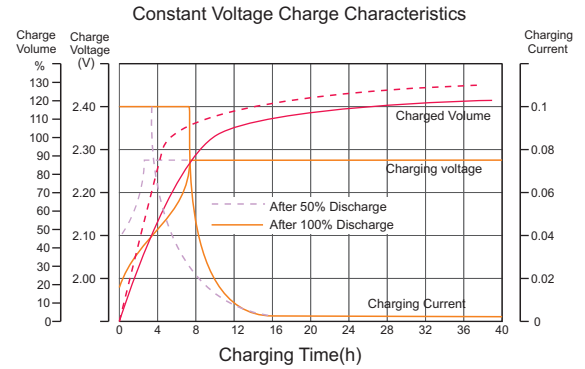


## Cycle Life In Relation To Depth Of Discharge

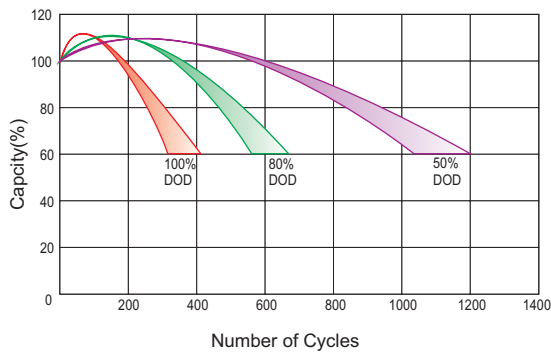


## Relationship Between Charging Voltage And Temperature

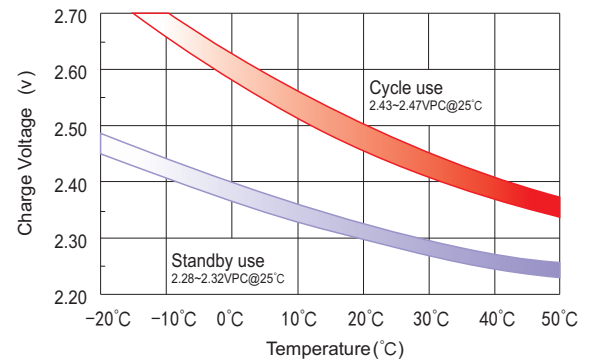


## Temperature Effects On Capacity

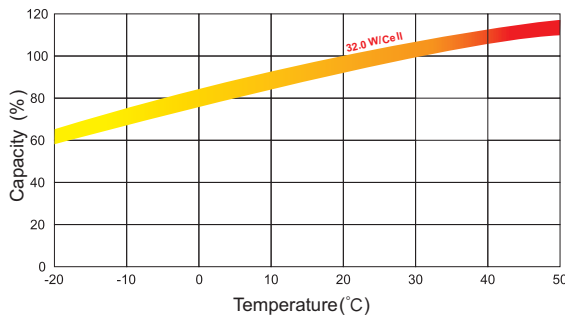


## Storage Characteristics

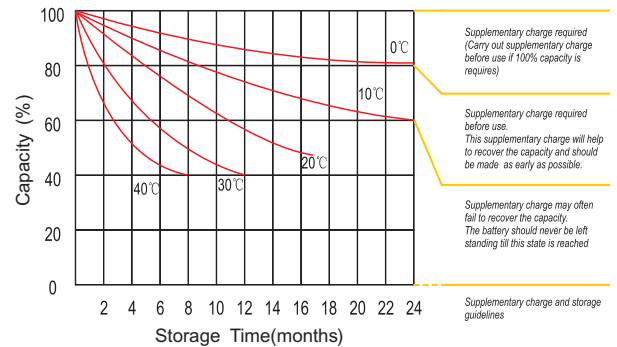

## Effect Of Temperature On Long Term Life

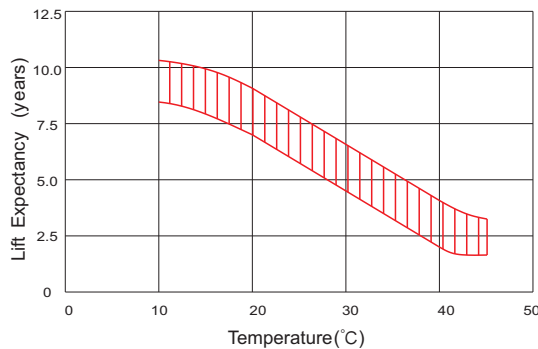

## Life Characteristics Of Standby Use

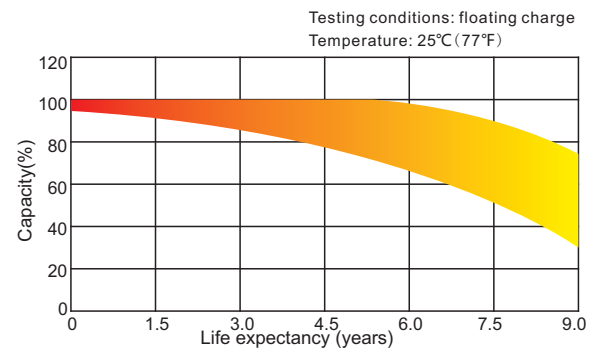

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:  
**Moore & Moore Solutions, Inc.**  
**Phone: 484-302-7009**  
**Email: mr@mooreu.com**  
**www.MooreU.com**