



# HR12-18W






## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	18W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 1.60 Kg (Tolerance ±4.0%)
Internal Resistance	Approx. 35 mΩ
Terminal	F1/F2
Max. Discharge Current	45A (5 sec)
Short Circuit Current	250A
Design Life	Could Reach 8 years
Recommended Maximum Charging Current	1.35 A
Reference Capacity	C10 4.2AH C20 4.5AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C
Cycle Use Voltage	14.6 V~14.8 V @ 25°C
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Constainer Material	A.B.S. UL94-HB, UL94-V0 Optional.

The HR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids and specially designed active material the HR series is with lower I.R, lower self discharge rate, high power, and longer service life performance. Generally the HR series offers 30% more power output than the standard range. Suitable for high power standby and cycling situation, such as UPS, datacenter, electric tools et al.



## Dimensions

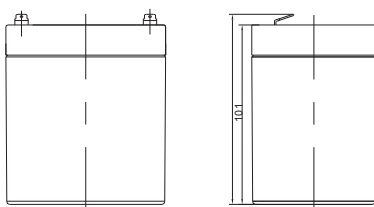

Length	90±1mm (3.54 inches)
Width	70±1mm (2.76 inches)
Height	101±1mm (3.98 inches)
Total Height	106±1mm (4.17 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A (25°C)

F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	20.68	17.99	14.95	13.19	10.20	8.255	6.044	3.524	2.569
1.67V	19.14	16.64	14.03	12.38	9.67	7.701	5.762	3.359	2.445
1.70V	18.34	15.95	13.53	11.93	9.37	7.407	5.599	3.262	2.372
1.75V	17.33	15.07	12.86	11.20	8.93	7.204	5.441	3.209	2.319
1.80V	16.30	14.17	12.18	10.47	8.48	6.991	5.274	3.145	2.263
1.85V	15.21	13.22	11.45	9.71	8.00	6.747	5.079	3.070	2.195

### Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	37.5	32.6	27.5	24.4	19.0	15.2	11.1	6.5	4.8
1.67V	35.0	30.4	26.0	23.1	18.2	14.3	10.7	6.3	4.6
1.70V	33.9	29.5	25.4	22.5	17.8	13.9	10.5	6.2	4.5
1.75V	32.5	28.2	24.5	21.4	17.2	13.7	10.4	6.1	4.5
1.80V	31.0	26.9	23.5	20.3	16.6	13.5	10.2	6.1	4.4
1.85V	29.5	25.6	22.5	19.2	15.9	13.3	10.0	6.1	4.4

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


# HR12-18W




## Discharge Characteristics Curve

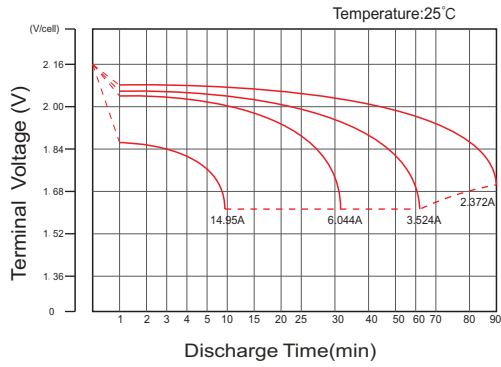


## Charge Characteristic Curve For Standby Use

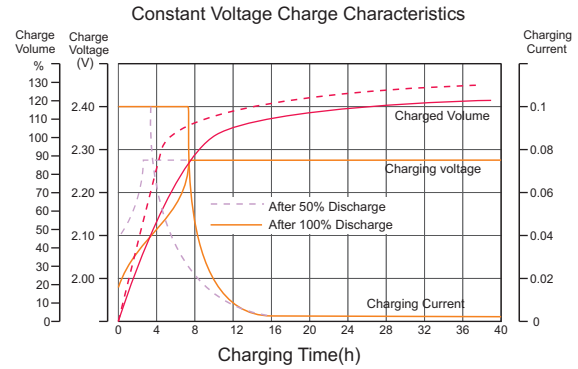


## Cycle Life In Relation To Depth Of Discharge

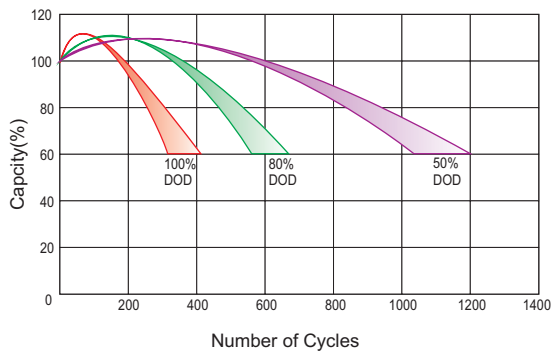


## Relationship Between Charging Voltage And Temperature

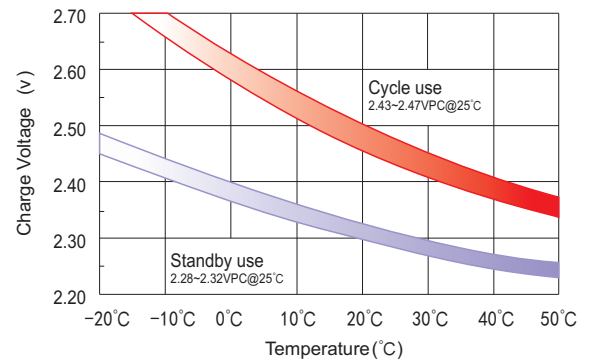


## Temperature Effects On Capacity

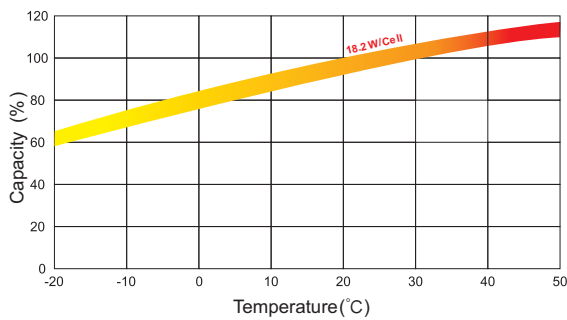


## Storage Characteristics

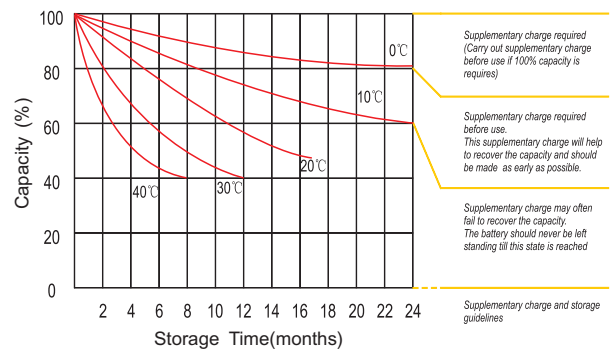

## Effect Of Temperature On Long Term Life

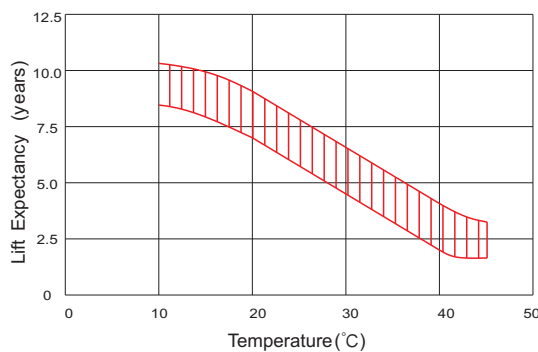

## Life Characteristics Of Standby Use

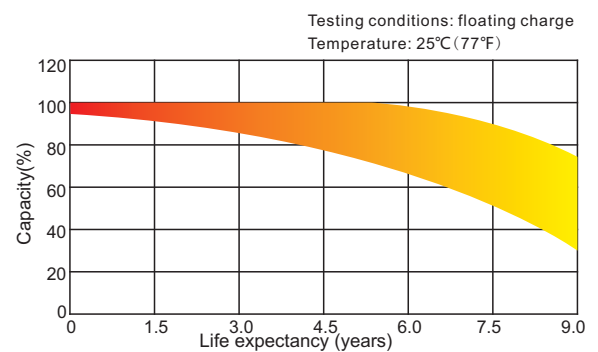

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:  
**Moore & Moore Solutions, Inc.**  
 Phone: 484-302-7009  
 Email: [mr@mooreu.com](mailto:mr@mooreu.com)  
[www.MooreU.com](http://www.MooreU.com)