

DG12-70(12V70Ah)



Specification




DG (Deep Cycle GEL) series is pure GEL battery with 15 years floating design life , it is ideal for standby or frequent cyclic discharge applications under extreme environments. By using strong grids, high purity lead and patented Gel electrolyte, the DG series offers excellent recovery capability after deep discharge under frequent cyclic discharge use, and can deliver 450 cycles at 100% DOD. Suitable for solar & wind system, CATV, marine, RV and deep discharge UPS, and telecommunication, etc.



Cells Per Unit	6
Voltage Per Unit	12
Capacity	70Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 22.5 Kg (Tolerance ±2%)
Internal Resistance	Approx. 8mΩ
Terminal	F5(M8)/F11 (M6)
Max. Discharge Current	700A (5 sec)
Design Life	15 years (floating charge)
Maximum Charging Current	14A
Reference Capacity	C3 47.7AH C5 55.0AH C10 61.4AH C20 70.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2 V~14.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

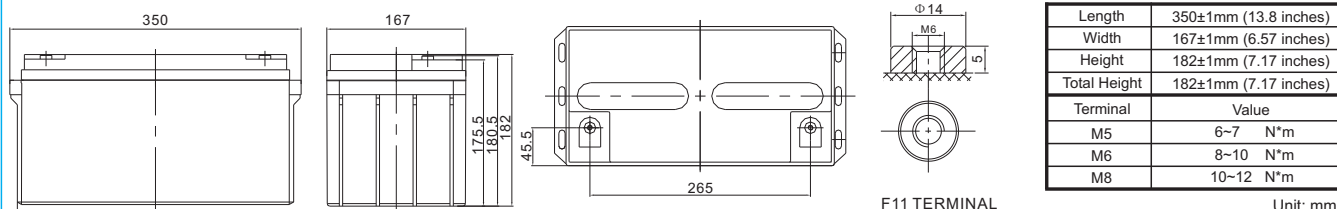

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	129.7	101.5	66.8	39.1	23.4	16.2	13.4	11.3	7.70	6.39	3.85
1.65V	123.5	99.4	65.7	38.9	23.2	16.1	13.3	11.2	7.64	6.32	3.71
1.70V	119.1	97.9	65.1	38.6	23.0	16.0	13.3	11.1	7.57	6.26	3.61
1.75V	111.2	94.3	65.2	38.2	22.9	15.9	13.1	11.0	7.51	6.20	3.50
1.80V	102.6	87.9	64.7	37.3	22.5	15.5	12.8	10.8	7.39	6.14	3.29
1.85V	92.8	79.8	61.2	35.5	21.5	14.8	12.2	10.3	7.07	5.96	3.15

Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	230	184	125	75.4	46.0	32.0	26.6	22.4	15.3	12.7	6.81
1.65V	223	182	123	75.2	45.7	32.1	26.6	22.4	15.2	12.6	6.69
1.70V	217	179	124	74.6	45.4	31.9	26.5	22.3	15.1	12.5	6.57
1.75V	205	173	124	73.9	45.1	31.8	26.3	22.0	15.0	12.4	6.44
1.80V	191	162	123	72.6	44.5	30.9	25.7	21.6	14.8	12.3	6.32
1.85V	175	147	117	69.5	42.9	29.6	24.4	20.7	14.1	11.9	5.95

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


DG12-70(12V70Ah)




Discharge Characteristics Curve

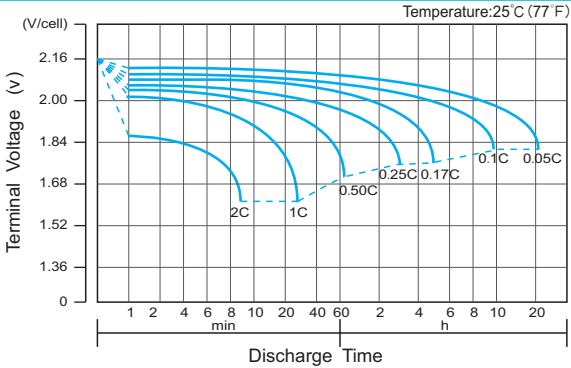


Charge Characteristic Curve for Cycle Use(IU)

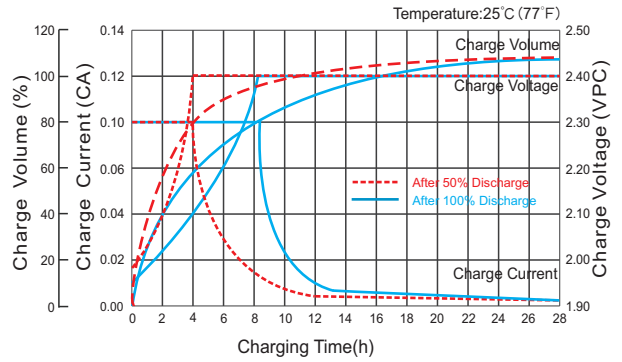


Cycle Life in Relation to Depth of Discharge

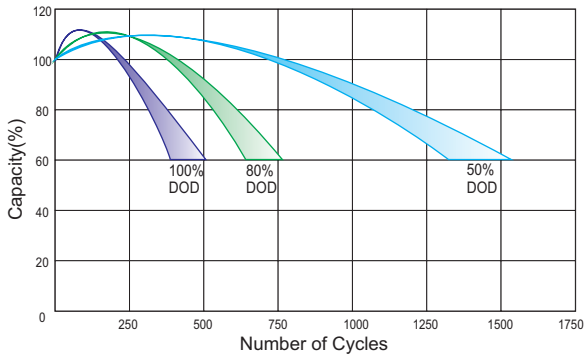


Relationship Between Charging Voltage and Temperature

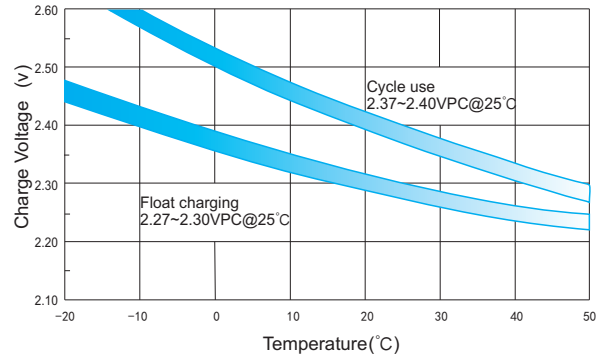


Temperature Effects on Capacity

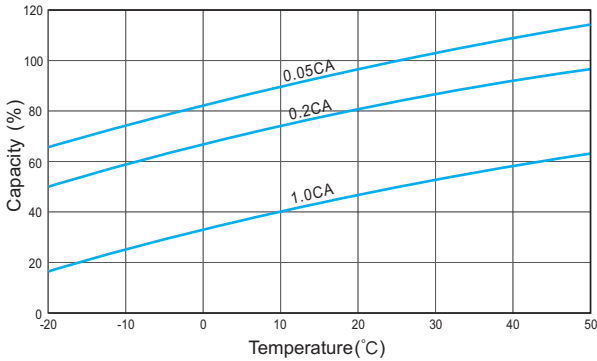


Storage Characteristics

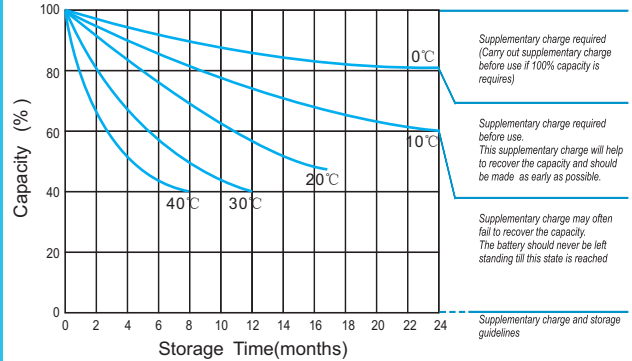

Effect of Temperature on Long Term Life

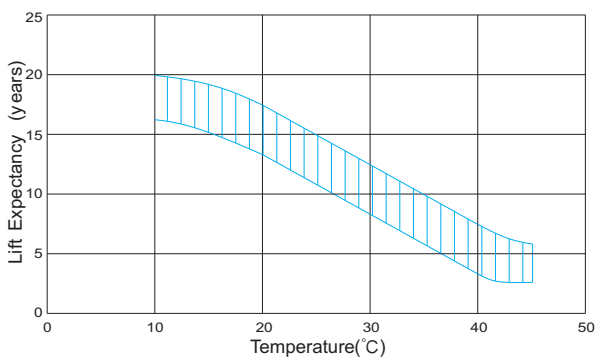

Relationship of OCV And State of Charge(20°C)

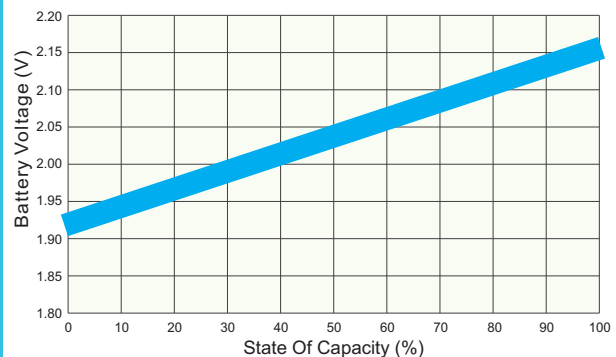

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:
Moore & Moore Solutions, Inc.
 Phone: 484-302-7009
 Email: mr@mooreu.com
www.MooreU.com