

DG2-200(2V200Ah)



Specification




Cells Per Unit	1
Voltage Per Unit	2
Capacity	200Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 14.0 Kg (Tolerance ±3%)
Internal Resistance	Approx. 0.8 mΩ
Terminal	F10(M8)
Max. Discharge Current	1000A (5 sec)
Design Life	20 years (floating charge)
Maximum Charging Current	40.0 A
Reference Capacity	C3 156.0AH C5 173.0AH C10 200.0AH C20 212.0AH
Float Charging Voltage	2.27 V~2.30 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.37 V~2.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



DG (Deep Cycle GEL) series is pure GEL battery with 20 years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By using strong grids, high purity lead and patented Gel electrolyte, the DG series offers excellent recovery capability after deep discharge under frequent cyclic discharge use, and can deliver 450 cycles at 100% DOD. Suitable for solar & wind system, CATV, marine, RV and deep discharge UPS, and telecommunication, etc.



Dimensions



Length	172.5±1mm (6.79 inches)
Width	110±1mm (4.33 inches)
Height	328±1mm (12.9 inches)
Total Height	351±1mm (13.8 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

F10 TERMINAL

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	252.6	195.6	130.8	80.2	58.6	45.0	36.0	32.6	26.6	20.8	11.2
1.65V	240.2	187.8	129.2	77.4	56.2	44.0	35.6	31.8	25.4	20.6	11.0
1.70V	224.0	177.0	126.8	76.2	54.8	43.0	35.0	31.0	25.0	20.4	10.8
1.75V	198.8	159.2	116.6	72.0	52.0	41.6	34.6	29.4	24.2	20.2	10.6
1.80V	171.2	145.0	110.0	68.6	50.0	40.0	34.0	29.0	23.8	20.0	10.4
1.85V	144.8	130.6	101.6	64.8	47.6	39.0	32.0	27.4	22.6	19.4	9.80

Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	442.2	356.4	243.6	150.2	109.2	79.2	71.4	62.8	50.6	41.4	22.4
1.65V	430.6	354.4	242.2	148.0	107.0	78.0	70.8	62.0	50.2	41.0	22.0
1.70V	406.8	335.4	239.8	145.8	105.4	77.8	70.0	60.6	49.4	40.8	21.6
1.75V	362.2	302.4	225.0	138.2	101.6	73.8	69.0	57.6	47.8	40.4	21.2
1.80V	313.6	275.8	214.0	131.8	97.4	73.6	67.8	56.8	47.0	40.0	20.8
1.85V	267.4	248.6	198.4	124.8	92.8	68.2	64.0	53.8	44.6	38.8	19.6

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


DG2-200(2V200Ah)




Discharge Characteristics Curve

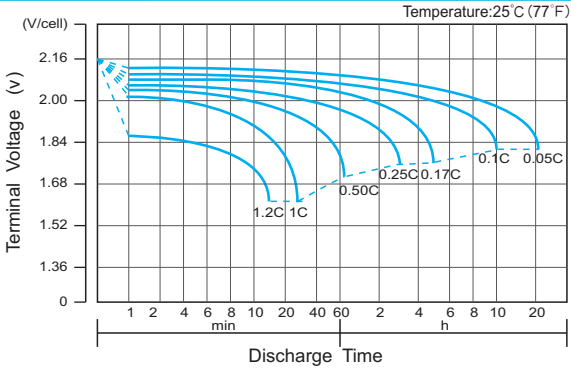


Charge Characteristic Curve for Cycle Use(IU)

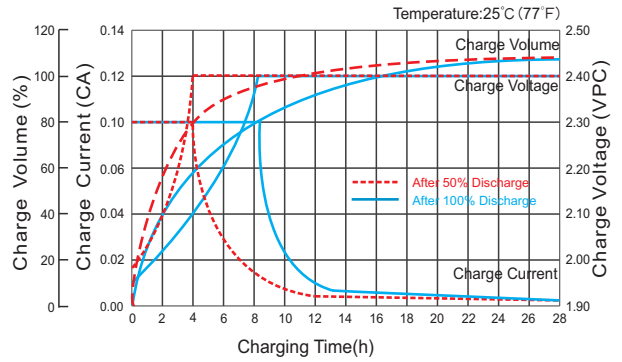


Cycle Life in Relation to Depth of Discharge

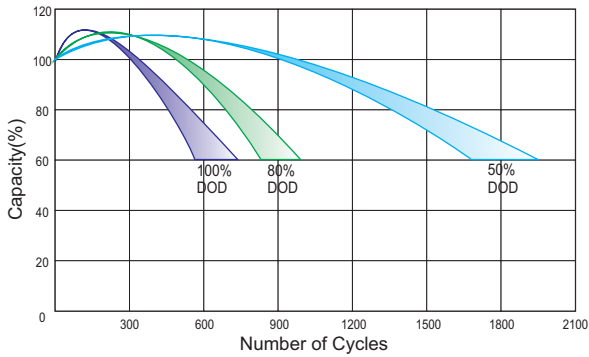


Relationship Between Charging Voltage and Temperature

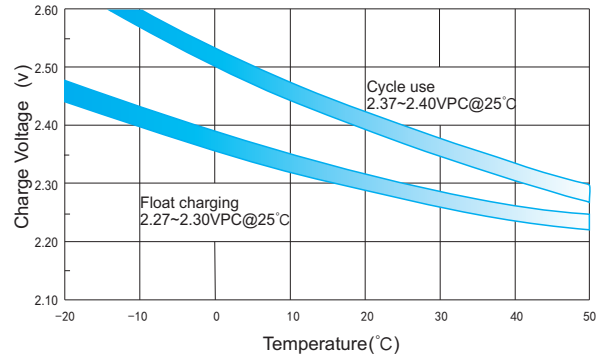


Temperature Effects on Capacity

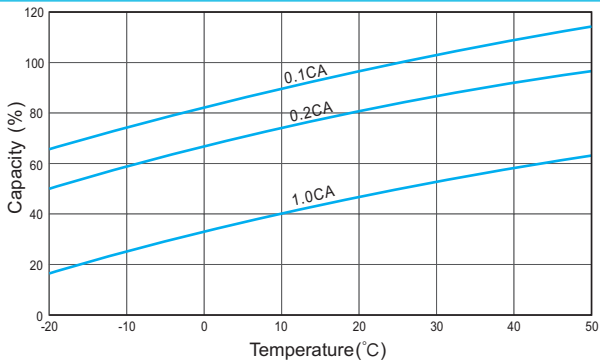


Storage Characteristics

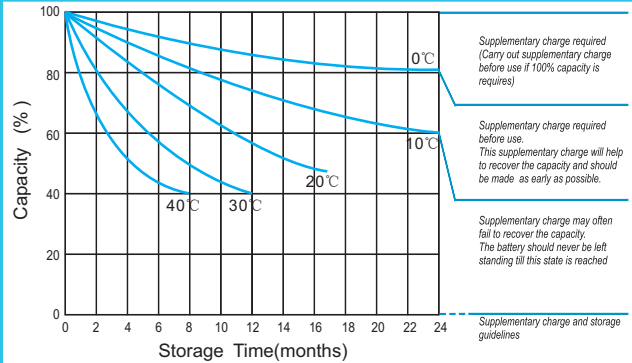

Effect of Temperature on Long Term Life

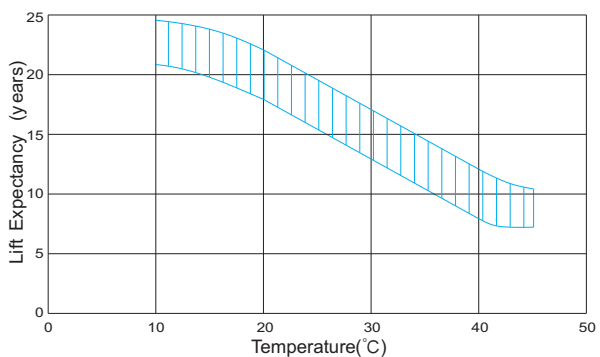

Relationship of OCV And State of Charge(20°C)

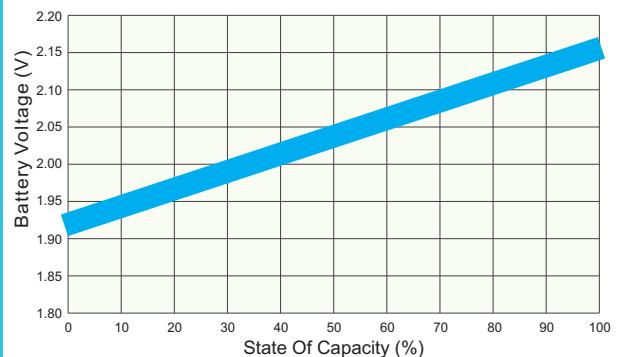

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:

Moore & Moore Solutions, Inc.
 Phone: 484-302-7009
 Email: mr@mooreu.com
www.MooreU.com