



RT12280(12V28Ah)

Specification

Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	28Ah@20hour-rate to 1.75V per cell @25°C
Weight	Approx. 8.6 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 9 mΩ
Terminal	F13(M5)/F3(M5)
Max. Discharge Current	280A (5 sec)
Short Circuit Current	960A
Design Life	6~8 years (Float charging)
Recommended Maximum Charging Current	8.4 A
Reference Capacity	C3 21.7AH C5 24.5AH C10 26.3AH C20 28.2AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RT series is a general purpose battery with 6~8 years design life in float service. It meets with IEC, JIS, BS and YDT standards. With advanced AGM valve regulated technology and high purity raw material, the RT series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



Dimensions

Length	166±1.5mm (6.54 inches)
Width	178±1.5mm (7.00 inches)
Height	125±1.5mm (4.92 inches)
Total Height	125±1.5mm (4.92 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	105.46	68.78	50.74	29.36	16.97	10.54	7.660	6.100	5.149	3.441	2.802	1.458
1.65V	101.65	66.73	49.41	28.72	16.65	10.38	7.559	6.024	5.090	3.406	2.776	1.446
1.70V	96.70	64.04	47.66	27.87	16.24	10.18	7.423	5.923	5.011	3.360	2.740	1.431
1.75V	90.33	60.56	45.39	26.75	15.69	9.907	7.243	5.789	4.906	3.298	2.693	1.410
1.80V	82.30	56.12	42.46	25.31	14.97	9.550	7.006	5.613	4.766	3.217	2.631	1.382
1.85V	72.42	50.56	38.77	23.46	14.05	9.086	6.697	5.382	4.584	3.109	2.548	1.346

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	181.5	118.7	90.04	54.14	32.20	20.27	14.85	11.89	10.07	6.82	5.59	2.91
1.65V	179.6	118.2	89.52	53.74	31.94	20.12	14.74	11.80	10.01	6.77	5.55	2.90
1.70V	172.8	114.7	87.11	52.44	31.25	19.78	14.51	11.63	9.87	6.69	5.48	2.87
1.75V	164.3	110.4	84.16	50.85	30.35	19.35	14.22	11.41	9.70	6.58	5.39	2.83
1.80V	152.3	104.1	79.84	48.59	29.10	18.74	13.81	11.10	9.46	6.43	5.28	2.78
1.85V	136.4	95.45	73.93	45.49	27.51	17.93	13.26	10.68	9.13	6.23	5.12	2.71

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


RT12280(12V28Ah)




Discharge Characteristics Curve

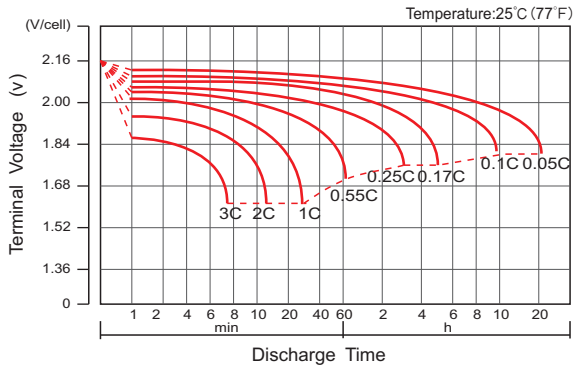


Charge Characteristic Curve For Standby Use

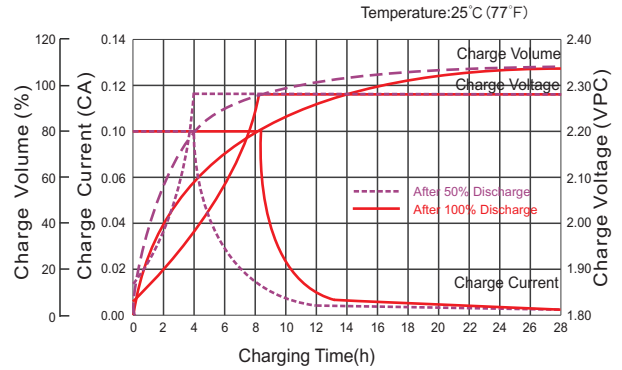


Cycle Life In Relation To Depth Of Discharge

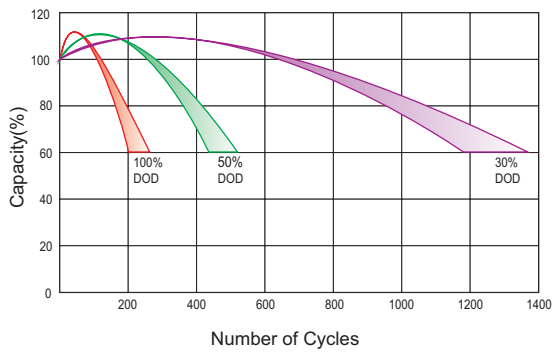


Relationship Between Charging Voltage And Temperature

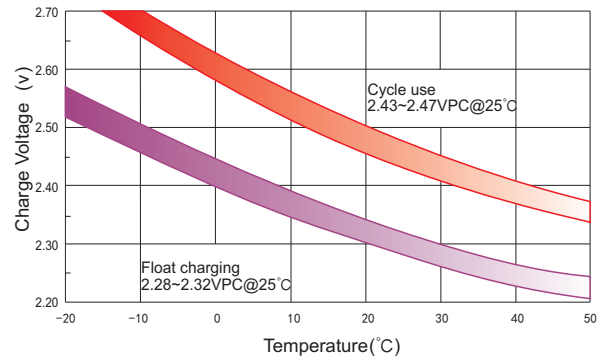


Temperature Effects On Capacity

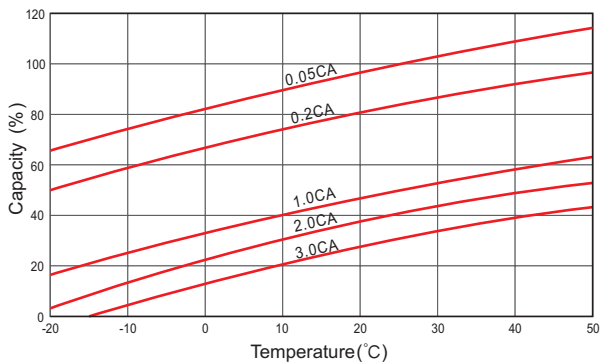


Storage Characteristics

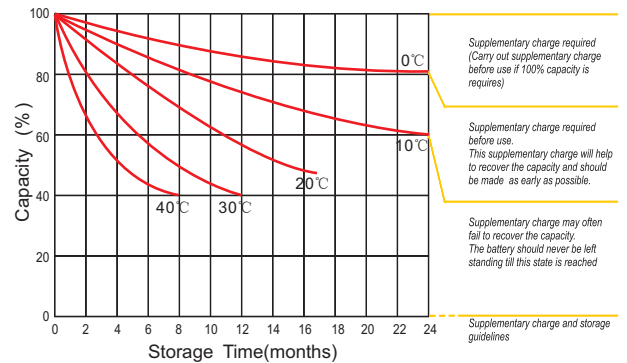

Effect Of Temperature On Long Term Life

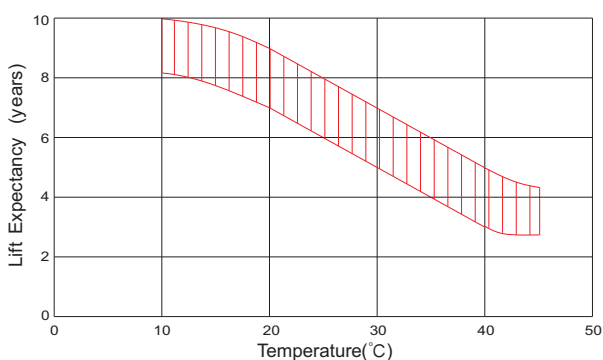

Life Characteristics Of Standby Use

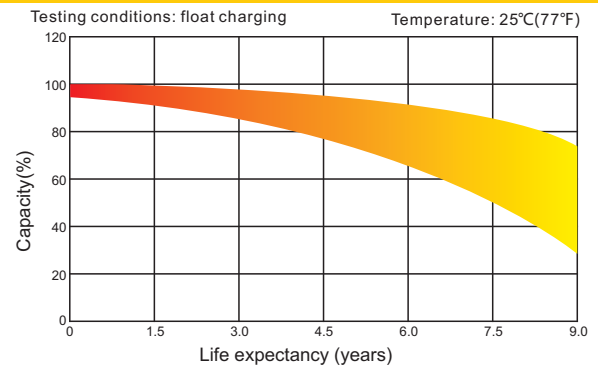

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:

Moore & Moore Solutions, Inc.
 Phone: 484-302-7009
 Email: mr@mooreu.com
 www.MooreU.com