



RA6-225S(6V225Ah)

Specification


Cells Per Unit	3
Voltage Per Unit	6
Nominal Capacity	225Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 32.0 Kg (Tolerance ±2%)
Internal Resistance	Approx. 1.7 mΩ
Terminal	F14(M8)
Max. Discharge Current	2250A (5 sec)
Short Circuit Current	4100A
Design Life	12 years (Float charging)
Recommended Maximum Charging Current	67.5 A
Reference Capacity	C3 174.6AH C5 201.0AH C10 225.0AH C20 238.0AH
Standby Use Voltage	6.80 V~6.90 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.10 V~7.20 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RA series is a general purpose battery with 12 years design life in float service. It meets with IEC, JIS, BS and YDT standards. With advanced AGM valve regulated technology and high purity raw material, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



Dimensions

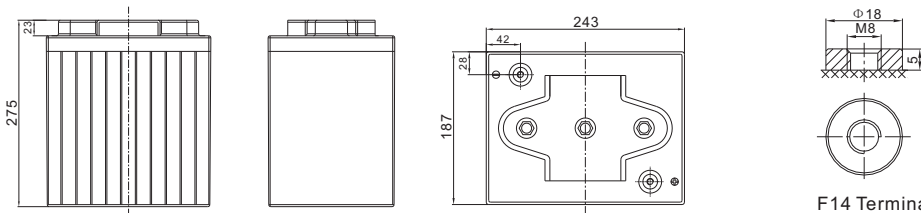

Length	243±2mm (9.57 inches)
Width	187±2mm (7.36 inches)
Height	275±2mm (10.8 inches)
Total Height	275±2mm (10.8 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	395.3	238.4	139.9	83.8	61.6	50.0	42.2	28.2	24.0	12.3
1.65V	385.0	233.2	137.3	82.6	60.7	49.4	41.7	27.9	23.8	12.2
1.70V	371.4	226.3	133.9	81.0	59.6	48.6	41.1	27.5	23.5	12.1
1.75V	353.6	217.2	129.4	78.8	58.2	47.5	40.2	27.0	23.0	11.9
1.80V	330.8	205.5	123.5	76.0	56.3	46.0	39.1	26.4	22.5	11.7
1.85V	302.0	190.5	115.9	72.3	53.8	44.1	37.6	25.5	21.8	11.4

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	701.5	439.6	265.5	161.3	119.3	97.4	82.6	55.9	47.9	24.6
1.65V	697.5	436.3	263.4	160.0	118.5	96.7	82.0	55.5	47.5	24.4
1.70V	678.7	425.8	257.7	157.4	116.6	95.3	80.9	54.8	46.9	24.2
1.75V	655.7	412.9	250.2	153.9	114.3	93.5	79.5	53.9	46.2	23.9
1.80V	622.1	394.5	240.0	149.1	111.0	91.0	77.5	52.7	45.1	23.4
1.85V	576.0	369.4	226.8	142.6	106.6	87.6	74.8	51.1	43.8	22.8

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


RA6-225S(6V225Ah)




Discharge Characteristics Curve

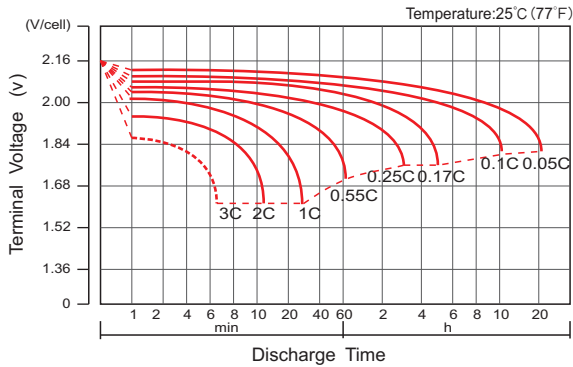


Charge Characteristic Curve For Standby Use

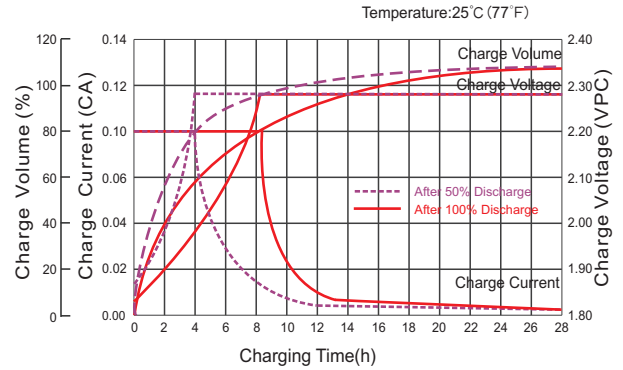


Cycle Life In Relation To Depth Of Discharge

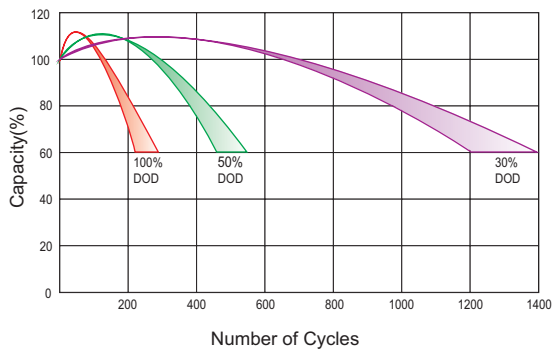


Relationship Between Charging Voltage And Temperature

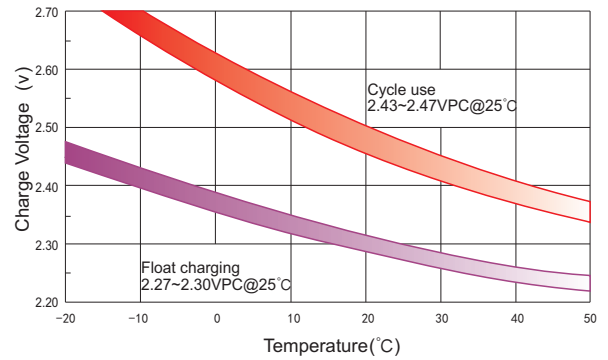


Temperature Effects On Capacity

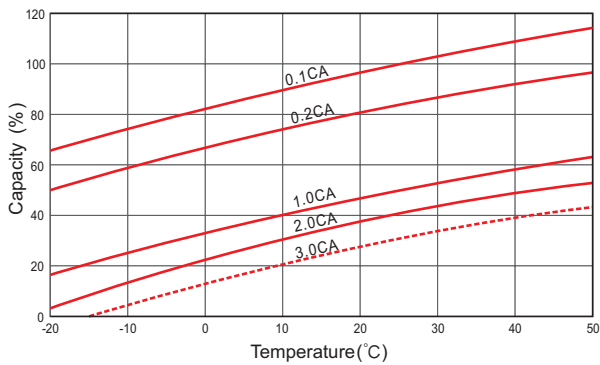


Storage Characteristics

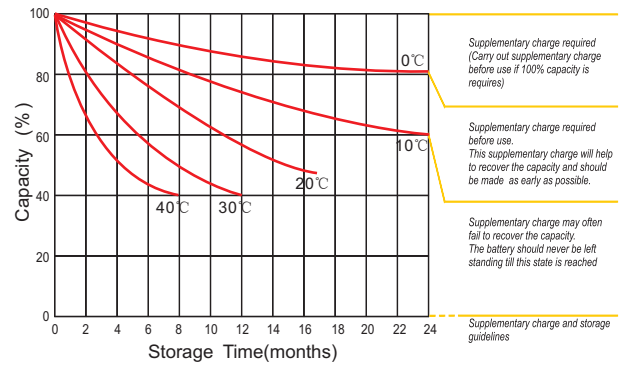

Effect Of Temperature On Long Term Life

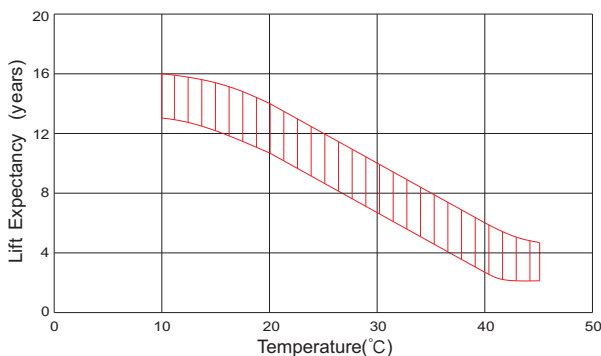

Life Characteristics Of Standby Use

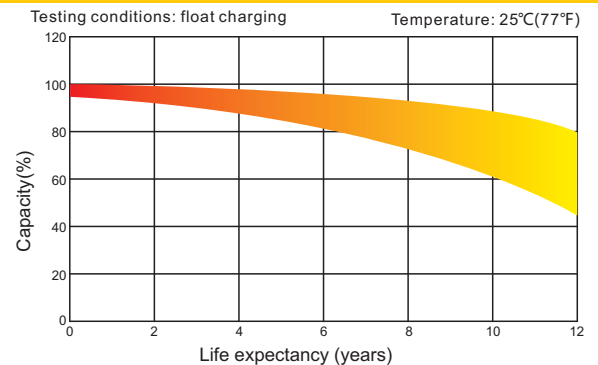

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:

Moore & Moore Solutions, Inc.
 Phone: 484-302-7009
 Email: mr@mooreu.com
 www.MooreU.com