



EV12-75(12V75Ah)



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	75Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 23.5 Kg (Tolerance ±3%)
Internal Resistance	Approx. 6.0 mΩ
Terminal	F11 (M6)/F15 (M6)
Max. Discharge Current	750A (5 sec)
Cold Cranking Ampere(CCA)	470A
Maximum Charging Current	22.5 A
Reference Capacity	C3 58.8AH
	C5 66.0AH
	C10 71.3AH
	C20 75.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C
	Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



EV (Electric Vehicle) series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the EV series battery offers reliable performance in high load situations and could provide competitive cycle performance. Suitable for Electric Vehicle and Golf cart; Industrial equipment, Floor machines, Forklifts, Aerial lifts, and Robotics; Marine, RV, and no-idle solutions; Mobility and Medical equipment; and most outdoor application.



ISO 9001



ISO 14001



OHSAS 18001







MH 28539



G4M20206-0910-E-16

Dimensions



F11 TERMINAL

Length	260±2mm (10.2 inches)
Width	169±2mm (6.65 inches)
Height	211±2mm (8.31 inches)
Total Height	216±2mm (8.50 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	80.3	46.4	27.4	20.9	16.4	13.9	9.22	7.65	3.90
1.65V	78.6	45.5	27.0	20.6	16.2	13.7	9.11	7.57	3.86
1.70V	76.4	44.3	26.4	20.1	15.9	13.5	8.98	7.47	3.82
1.75V	73.3	42.8	25.5	19.6	15.5	13.2	8.79	7.33	3.75
1.80V	69.2	40.6	24.3	18.8	14.9	12.7	8.52	7.13	3.66
1.85V	63.3	37.5	22.7	17.6	14.1	12.1	8.14	6.84	3.52









Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	146	86.7	52.0	39.9	31.6	26.8	18.0	15.0	7.67
1.65V	145	86.0	51.5	39.5	31.3	26.6	17.9	14.9	7.62
1.70V	142	84.1	50.5	38.8	30.8	26.2	17.6	14.7	7.53
1.75V	137	81.5	49.1	37.8	30.1	25.7	17.3	14.5	7.41
1.80V	131	77.7	47.1	36.4	29.1	24.9	16.8	14.1	7.24
1.85V	121	72.3	44.1	34.3	27.6	23.8	16.1	13.5	6.99

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.



EV12-75(12V75Ah)

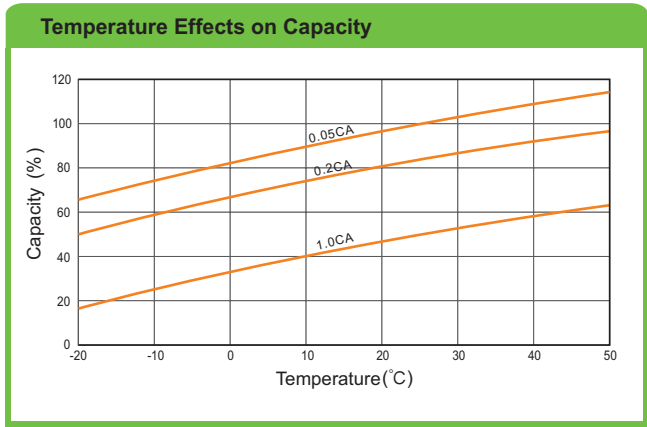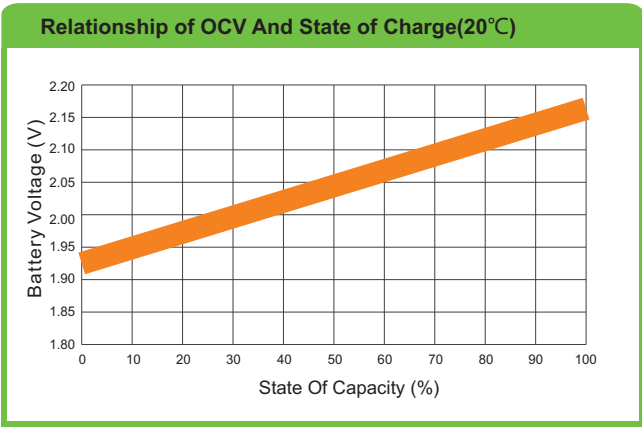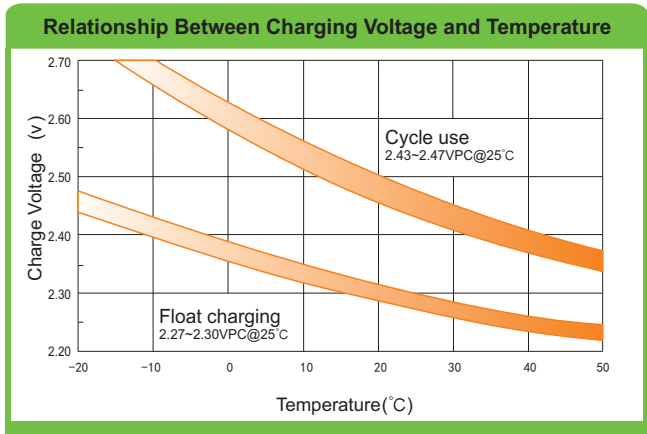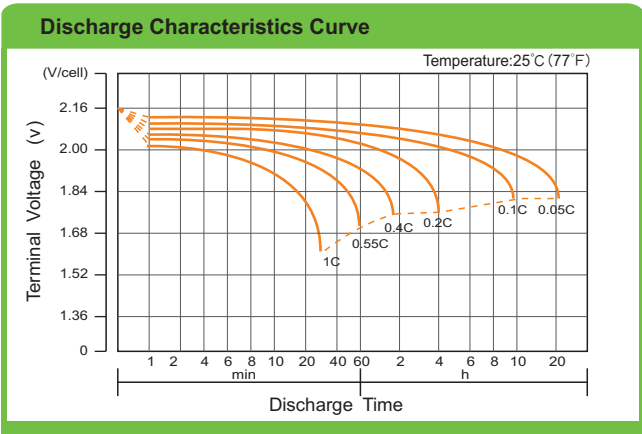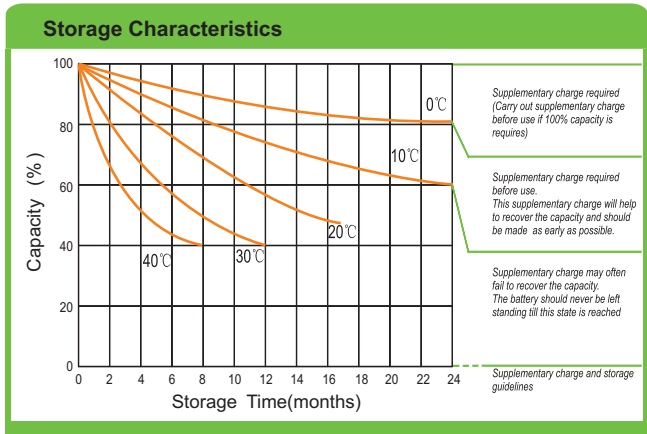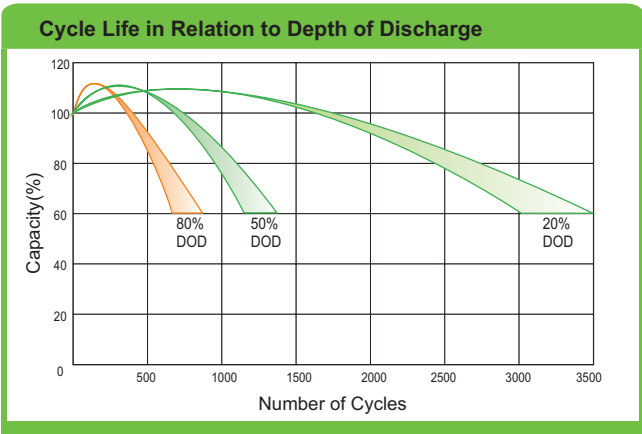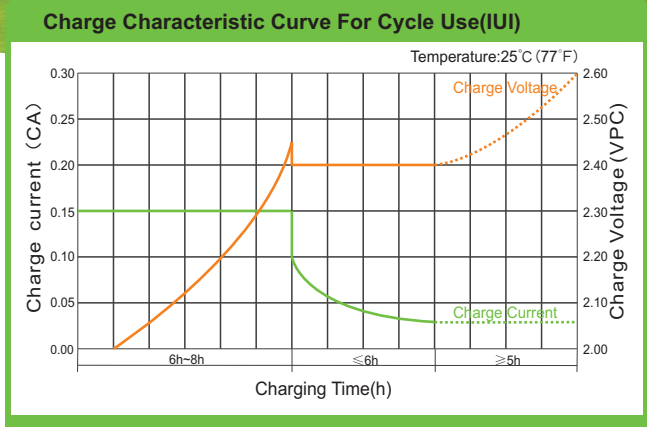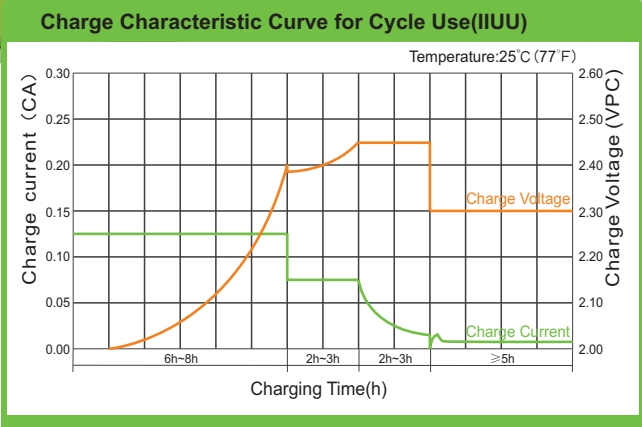

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:
Moore & Moore Solutions, Inc.
 Phone: 484-302-7009
 Email: mr@mooreu.com
www.MooreU.com