



RL2-250A(2V250Ah)

Specification


Cells Per Unit	1
Voltage Per Unit	2
Nominal Capacity	250Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 13.8 Kg (Tolerance ± 3%)
Internal Resistance	Approx. 0.78 mΩ
Terminal	F10(M8)
Max. Discharge Current	1250A (5 sec)
Short Circuit Current	2800A
Design Life	20 years (Float charging)
Recommended Maximum Charging Current	50 A
Reference Capacity	C1 148.7AH C3 193.8AH C5 218.5AH C10 250.0AH
Standby Use Voltage	2.27 V~2.30 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.43 V~2.47 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: -0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging be stored for up to 6 months at 25°C and then recharging than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RL series is a general purpose battery with 20 years design life in float service. It meets with heavy duty grids, thicker plates, special additives and advanced AGM valve regulated technology, the RL series battery provides consistent performance and long service life. The new grid design effectively reduces the internal resistance, which provides higher specific energy density and excellent high rate discharge characteristics. It is suitable for communications back-up power and EPS/UPS applications.



Dimensions

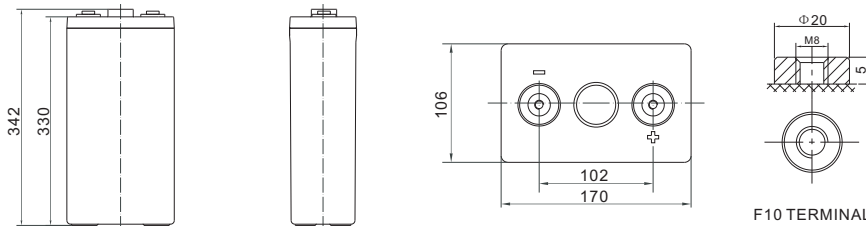

Length	170±2mm (6.69 inches)
Width	106±2mm (4.17 inches)
Height	330±2mm (13.0 inches)
Total Height	342±2mm (13.5 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR
1.60V	333.5	246.7	148.7	89.7	68.3	54.5	45.9	31.7	26.6
1.67V	324.8	241.3	145.9	88.4	67.4	53.8	45.4	31.4	26.4
1.70V	313.3	234.1	142.3	86.6	66.2	52.9	44.7	30.9	26.0
1.75V	298.4	224.8	137.5	84.3	64.6	51.7	43.7	30.4	25.6
1.80V	279.1	212.6	131.2	81.3	62.5	50.2	42.5	29.6	25.0
1.85V	254.8	197.1	123.2	77.3	59.7	48.1	40.9	28.6	24.2

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR
1.60V	605.8	461.3	281.8	171.3	131.2	105.1	89.7	62.3	52.4
1.67V	598.7	455.9	278.6	169.8	130.1	104.3	88.9	61.8	52.0
1.70V	580.8	443.9	272.5	166.9	128.1	102.8	87.7	61.0	51.4
1.75V	558.8	428.3	264.5	163.1	125.5	100.8	86.0	59.9	50.6
1.80V	528.0	407.1	253.8	157.8	121.8	98.1	83.7	58.5	49.5
1.85V	486.9	380.1	239.5	150.8	116.9	94.3	80.7	56.6	48.0

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


RL2-250A(2V250Ah)




Discharge Characteristics Curve

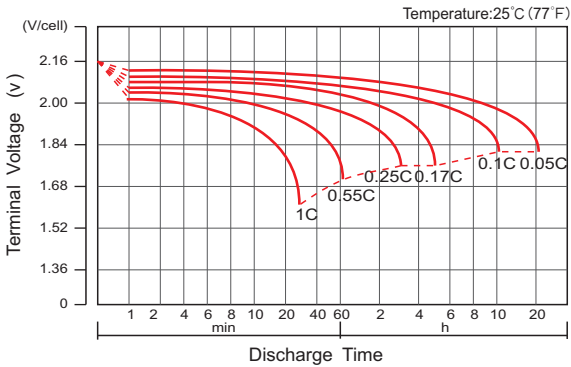


Charge Characteristic Curve For Standby Use

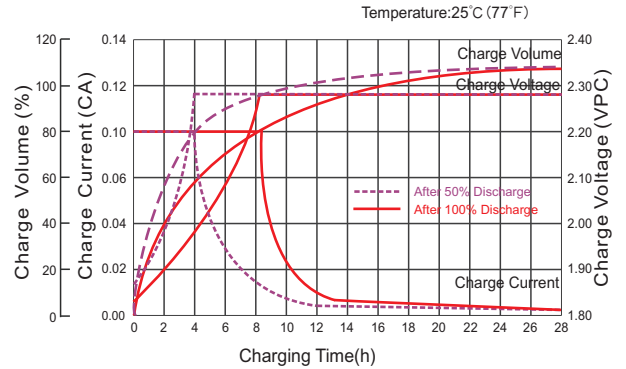


Cycle Life In Relation To Depth Of Discharge

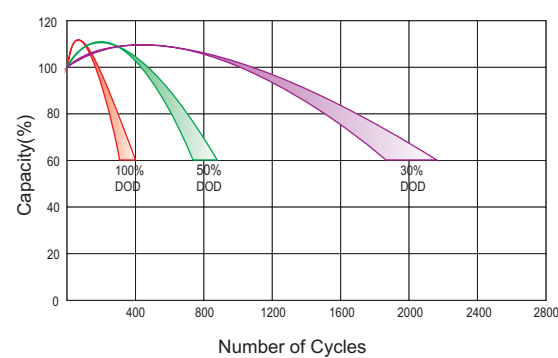


Relationship Between Charging Voltage And Temperature

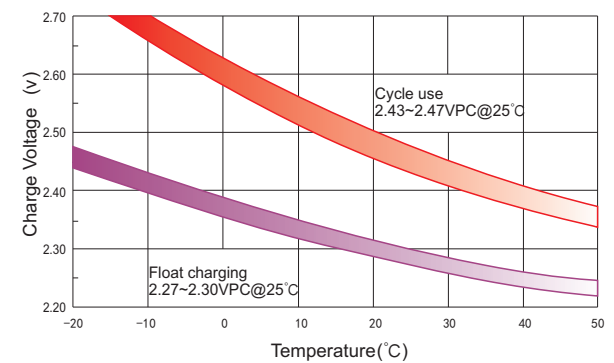


Temperature Effects On Capacity

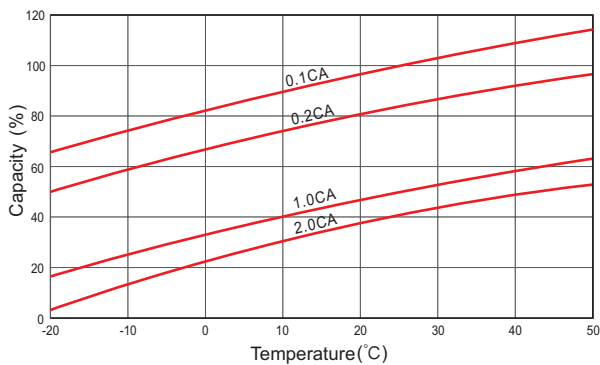


Storage Characteristics

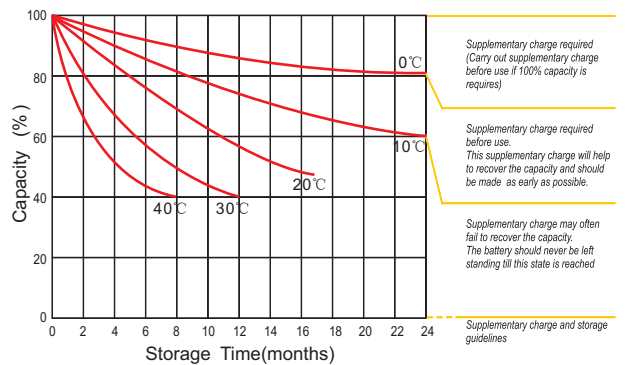

Effect Of Temperature On Long Term Life

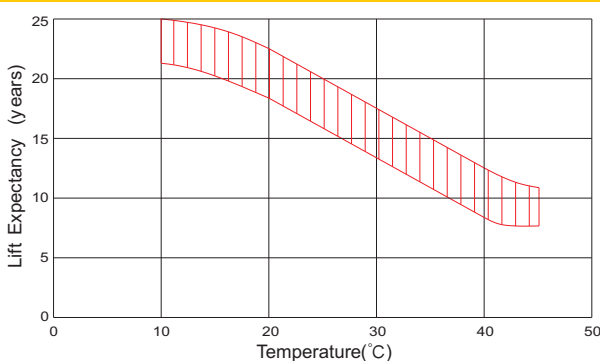

Charge Characteristic Curve For Standby Use

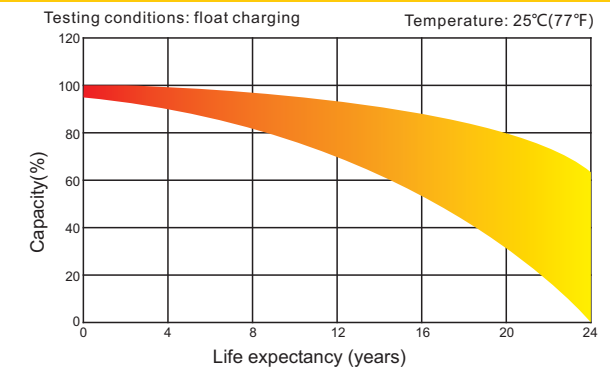

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:
Moore & Moore Solutions, Inc.
Phone: 484-302-7009
Email: mr@mooreu.com
www.MooreU.com