



EVX Series

EVX 1272 Datasheet

12V Top Terminal VRLA-AGM

Specifications

| | |
|-------------------------------------|---|
| Voltage (Vdc) | 12 |
| Nominal Capacity (1.75 VPC @25°C) | 7.2 Ah @20hr-rate |
| Ah Capacity (8-Hr 1.75 VPC @ 25°C) | 6.00 |
| Ah Capacity (20-Hr 1.75 VPC @ 25°C) | 7.20 |
| Ah Capacity (8-Hr 1.80 VPC @ 25°C) | 5.76 |
| Max Charge Current (A) | 2.16 |
| Max Discharge Current (A) | 130 * |
| Short Circuit Current (A) | 292 |
| Internal Resistance (mΩ) | Approx. 23.9 |
| Terminal Type | F2 terminal -Faston Tab 250 * |
| Terminal Torque | -- |
| Container Material | ABS (UL 94-HB) |
| Weight (kg. / lb., Approx.) | 2.55 / 5.62 |
| Length (L) (mm / in) | 150.9±2.0 / 5.94±0.08 |
| Width (W) (mm / in) | 64.8±1.0 / 2.55±0.04 |
| Height (H) (mm / in) | 98.6±1.0 / 3.88±0.04 |
| Design Life | 400 cycles @ 100%DOD at 25°C 1800 cycles @ 30%DOD at 25°C |
| Operating Temperature | Nominal: 25°C (77°F) Discharge: -15°C - 50°C (5°F-122°F) Charge/Storage: -15°C - 40°C (5°F - 104°F) |
| Float Charging Voltage | -- |
| Eq. Charging Voltage | 14.4 - 15.0 Vdc/battery 25°C (77°F) |
| Self-Discharge | Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F). |



Valve Regulated Lead Acid (VRLA) Battery

Maintenance-Free, Absorbent Glass Mat (AGM) Technology for Efficient Gas Recombination of up to 99%

Pure Lead Construction and Proprietary Elements

Designed for E-mobility or deep cycling applications

Built in Accordance with IEC 60254-1:2005 / IEC60254-2:2008 and UL1989 Recognized (MH14533)





EVX Series

EVX 1272 Datasheet


12V Top Terminal VRLA-AGM

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)




| F.V/Time | 30MIN | 45MIN | 60MIN | 90MIN | 2HR | 3HR | 4HR | 5HR | 6HR | 8HR | 10HR | 20HR |
|-------------------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|
| 10.02V (1.67 VPC) | 6.79 | 5.01 | 4.04 | 2.98 | 2.40 | 1.73 | 1.39 | 1.16 | 1.00 | 0.79 | 0.65 | 0.38 |
| 10.50V (1.75 VPC) | 6.38 | 4.71 | 3.80 | 2.81 | 2.27 | 1.63 | 1.32 | 1.10 | 0.95 | 0.75 | 0.62 | 0.36 |
| 10.80V (1.80 VPC) | 6.20 | 4.58 | 3.70 | 2.73 | 2.19 | 1.58 | 1.28 | 1.07 | 0.92 | 0.72 | 0.60 | 0.35 |

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

| F.V/Time | 30MIN | 45MIN | 60MIN | 90MIN | 2HR | 3HR | 4HR | 5HR | 6HR | 8HR | 10HR | 20HR |
|-------------------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|
| 10.02V (1.67 VPC) | 81.4 | 60.3 | 48.8 | 35.8 | 28.8 | 20.9 | 16.8 | 14.0 | 12.0 | 9.50 | 7.86 | 4.35 |
| 10.50V (1.75 VPC) | 76.8 | 56.8 | 45.9 | 33.8 | 27.1 | 19.6 | 15.8 | 13.2 | 11.4 | 8.96 | 7.49 | 4.14 |
| 10.80V (1.80 VPC) | 74.4 | 55.0 | 44.4 | 32.7 | 26.2 | 19.0 | 15.3 | 12.8 | 11.0 | 8.67 | 7.25 | 4.00 |

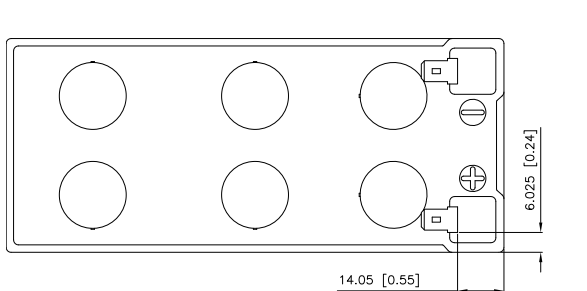

Detail A Drawing(3:1)

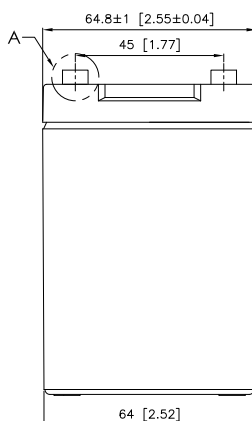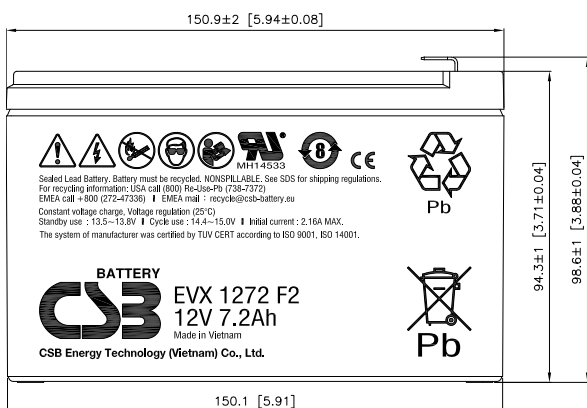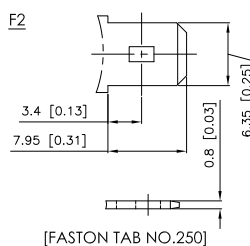

* F1 terminal is available, Max Discharge Current = 100 A (5sec)

