


IEEE/UL Battery  
Sizing by  
**MooreU**  
610-952-6067  
www.mooreu.com



# OPzS Series-Flooded Battery 7 OPzS490(2V490Ah)

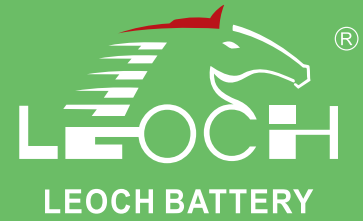


## Specifications

Rated Voltage	2V	
Nominal Capacity	C <sub>10</sub> , 1.80V/cell	490.0Ah
Dimension	Length	166±2mm (6.53 inches)
	Width	206±3mm (8.11 inches)
	Container Height	471±3mm (18.54 inches)
	Total Height	526±3mm (20.71 inches)
Approx Weight	Without Electrolyte	28.2kg (62.0lbs)
	With Electrolyte	38.0 kg (83.8lbs)
Terminal	M10	
Container Material	SAN transparent container	
Rated Capacity	490.0 Ah	(10hr, 49.0A, 1.80V/cell)
	435.0 Ah	(5hr, 87.0A, 1.75V/cell)
	377.7 Ah	(3hr, 125.9A, 1.75V/cell)
	279.8 Ah	(1hr, 279.8A, 1.60V/cell)
Max. Discharge Current	3920A (5s)	
Internal Resistance (20°C)	Approx 0.75mΩ	
Operating Temp. Range	Discharge	-15 ~ 55°C (5 ~ 131°F)
	Charge	0 ~ 45°C (32 ~ 113°F)
	Storage	-15 ~ 45°C (5 ~ 113°F)
Nominal Operating Temp. Range	25±5°C (77±9°F)	
Cycle Use	Initial Charging Current less than 0.15CA. Voltage	
	2.40V~2.45V at 20°C(68°F)Temp. Coefficient -5mV/°C	
Standby Use	Initial Charging Current less than 0.15CA. Voltage	
	2.23V~2.25V at 20°C(68°F)Temp. Coefficient -3mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	20°C (68°F)	100%
	0°C (32°F)	86%
Self Discharge	≤4% per month at 20°C	



## Layout

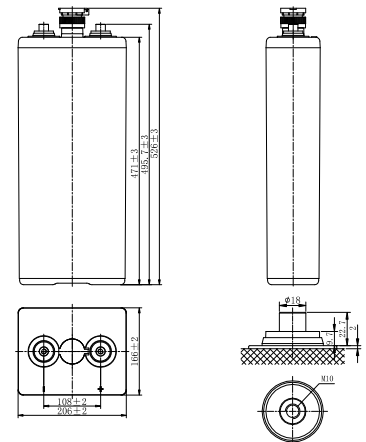

## Constant Current Discharge (Amperes) at 20 °C (68°F)

F. V/Time	1h	2h	3h	4h	5h	6h	8h	10h	20h	24h	72h	100h	120h
1.85V/cell	194.5	142.1	109.4	90.6	78.2	68.7	56.0	46.9	25.8	21.6	7.76	5.82	4.98
1.80V/cell	227.4	156.6	119.6	97.9	83.4	72.9	58.9	49.0	26.8	22.5	8.06	6.04	5.18
1.75V/cell	247.0	166.6	125.9	102.3	87.0	75.7	60.5	50.1	27.3	22.9	8.21	6.15	5.27
1.70V/cell	260.2	174.0	130.0	105.5	89.4	77.6	61.6	50.9	27.8	/	/	/	/
1.65V/cell	270.5	178.1	133.9	107.9	91.4	79.1	62.7	51.8	28.2	/	/	/	/
1.60V/cell	279.8	182.3	136.2	109.5	92.6	80.2	63.4	52.4	28.4	/	/	/	/

## Constant Power Discharge (Watts/cell) at 20 °C (68°F)

F. V/Time	1h	2h	3h	4h	5h	6h	8h	10h	20h	24h	72h	100h	120h
1.85V/cell	364.0	268.0	207.4	172.4	149.5	131.9	108.0	90.9	50.1	42.0	15.0	11.2	9.57
1.80V/cell	419.3	292.0	224.2	184.5	158.1	139.0	112.7	94.2	51.7	43.3	15.4	11.5	9.87
1.75V/cell	449.7	308.0	234.4	191.5	164.1	143.4	115.3	95.8	52.4	43.9	15.7	11.7	10.0
1.70V/cell	469.3	319.3	240.5	196.5	167.8	146.5	116.8	97.0	53.1	/	/	/	/
1.65V/cell	484.2	325.5	246.5	200.4	170.9	148.8	118.4	98.3	53.6	/	/	/	/
1.60V/cell	496.8	331.5	249.5	202.3	172.3	150.1	119.3	98.9	53.9	/	/	/	/




IEEE/UL Battery  
Sizing by  
**MooreU**  
610-952-6067  
www.mooreu.com



# OPzS Series-Flooded Battery

## 7 OPzS490(2V490Ah)

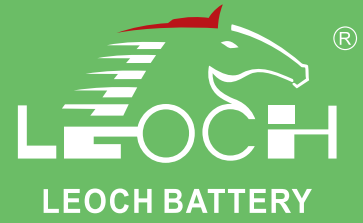

### Applications

- Telecommunications
- Buoy lighting
- Standby power
- Railway signalling
- Emergency lighting systems
- Alternative power (solar, wind)
- Maritime standby power on ships and ashore


### General Features

- 20 years design life(20°C)
- Lower self discharge
- Higher thermal capacity, no thermal runaway will occur
- Superior deep cycle performance
- Wide operation temperature range


### Standards

- Acc. to IEC60896, DIN 40736 standards
- Manufactured in Leoch@IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

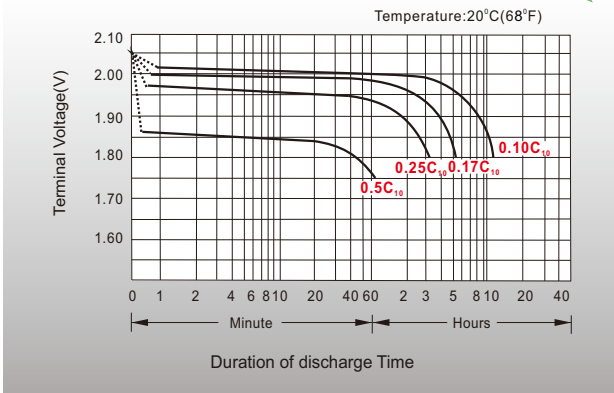


### Charge voltage Vs ambient temperature curve

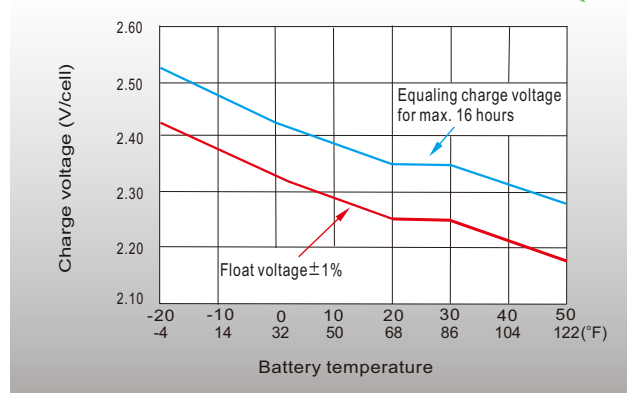

### Discharge capacity Vs Ambient temperature curve (I10A)

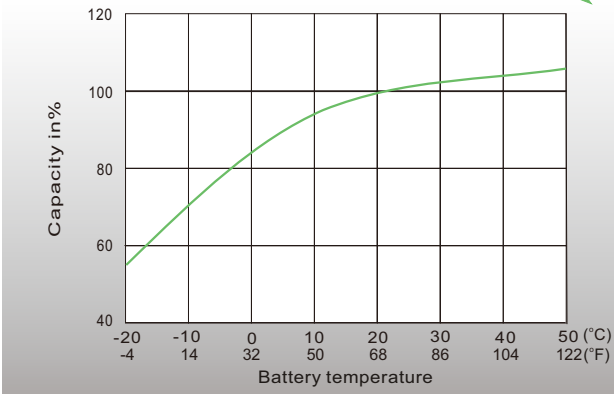

### Effect of Temperature on Long Term Float Life

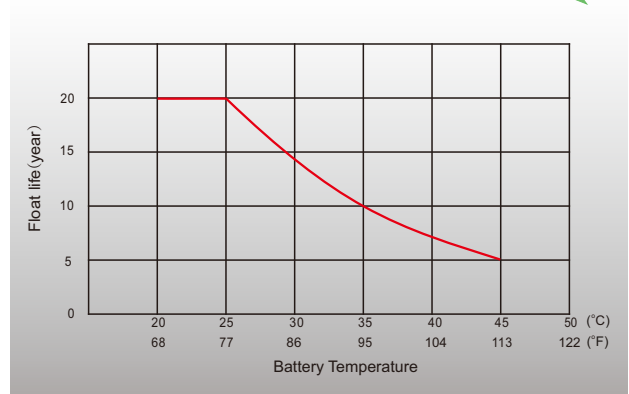

## Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

#### Australia Sales Office

2/29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us

#### UK Sales Office

9B Wheatstone Court. Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com

#### India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

[Http://www.leoch.us](http://www.leoch.us)

© 2022 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.

Subject to revisions without prior notice.

Publication No.:LB-7 OPzS490-PD-EN-V2.1-202205