

stored energy solutions for a demanding world



Model: 48NPFC10

NPFC Series

Narada NPFC series is a complete range of 48V LiFePO<sub>4</sub> (Lithium Iron Phosphate) battery products, for a wide variety of applications, such as telecom base station, UPS, renewable energy system, etc., with advanced life, standard size, light weight and strong environmental adaptability.




### Battery Management System(BMS)

For standard Narada lithium battery module, BMS is applied to monitor voltage, current, temperature of cells and module, take protections against over-charge, over-discharge, over-current, over-temperature, under-temperature and short circuit, etc., and provide cell balancing and current limitation during charging process to ensure a reliable safety and excellent performance.

Meantime, Narada supply customized upper computer software for BMS communication via RS232 or RS485 to set parameters or read monitoring data.

### Dimensions-mm

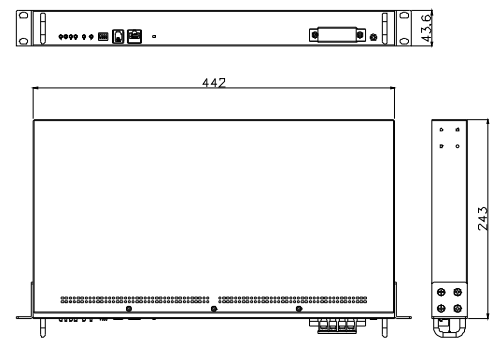

### Specifications

Battery Specification		
Rated Voltage		48V
Rated Capacity		10Ah (C <sub>5</sub> , 0.2C to 40.5V at 25°C)
Discharge Current (Max.)		10A
Discharge End Voltage		40.5V
Charge Current (Recomm.)		2A
Charge Current (Max.)		10A
Charge Voltage		54±0.5V
Dimensions	Width	442mm (17.40 inches)
	Depth	245mm (9.65 inches)
	Height	44mm (1.73 inches, 1U)
Typical Weight		7.3kg
Layout of Front Panel		
Status Indicators		SOC / ALM / RUN
Communication Ports		RS232 / RS485
Communication in Parallel		16 models in maximum
Reset Key		Available
Terminal Size		M4 / 10mm (Screw size / Cable Width)
LCD Screen		Optional
Breaker		Optional
Operation Environments		
Temperature Range	Discharge	-20 to +60 °C
	Charge	0 to +60 °C
	Storage	0 to +40 °C
Temperature Recommendation	Discharge	+15 to +35 °C
	Charge	+15 to +35 °C
	Storage	+15 to +30 °C
Humidity		5% to 95%

IEEE/UL Battery  
Sizing by  
**MooreU**  
610-952-6067  
www.mooreu.com

stored energy solutions for a demanding world



# Model: 48NPFC10

# NPFC Series



## Constant Current Discharge Characteristics (25°C,77°F)

End voltage	Current(A)										1C
	0.1C	0.15C	0.2C	0.25C	0.3C	0.4C	0.5C	0.6C	0.8C	1C	
	Time										Min
	Hours										
46.5V	9.61	6.36	4.74	3.80	3.14	2.21	1.68	1.31	1.02	41.3	
45.0V	9.79	6.49	4.85	3.89	3.23	2.39	1.88	1.53	1.17	52.6	
43.5V	9.91	6.59	4.93	3.98	3.27	2.45	1.94	1.60	1.21	55.7	
42.0V	10.00	6.65	4.97	3.97	3.30	2.48	1.97	1.63	1.23	57.0	
40.5V	10.05	6.69	5.00	4.00	3.33	2.50	1.99	1.65	1.24	57.9	
39.0V	10.07	6.71	5.02	4.02	3.34	2.50	2.00	1.66	1.24	58.3	

## Discharge Data with Constant Power (25°C,77°F)

End voltage	Power									540W
	45W	90W	135W	180W	225W	270W	315W	360W	540W	
	Time									Min
	Hours									
46.5V	10.89	5.34	3.50	2.55	1.96	1.57	1.29	1.07	--	
45.0V	11.09	5.45	3.59	2.65	2.07	1.70	1.44	1.24	0.5	
43.5V	11.22	5.52	3.63	2.68	2.12	1.73	1.47	1.27	33.1	
42.0V	11.30	5.56	3.66	2.71	2.13	1.76	1.49	1.30	43.2	
40.5V	11.35	5.59	3.68	2.73	2.15	1.78	1.50	1.30	46.5	
39.0V	11.38	5.60	3.69	2.74	2.16	1.79	1.51	1.32	47.9	

## Performance Curves

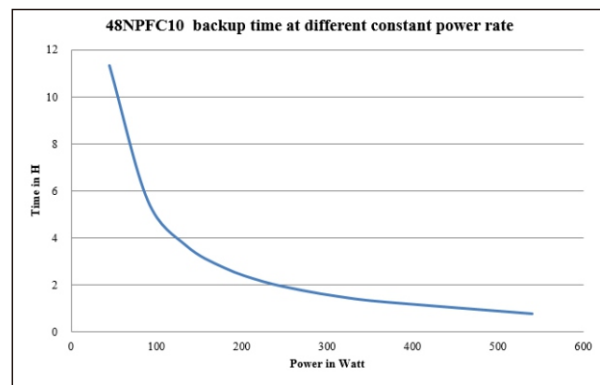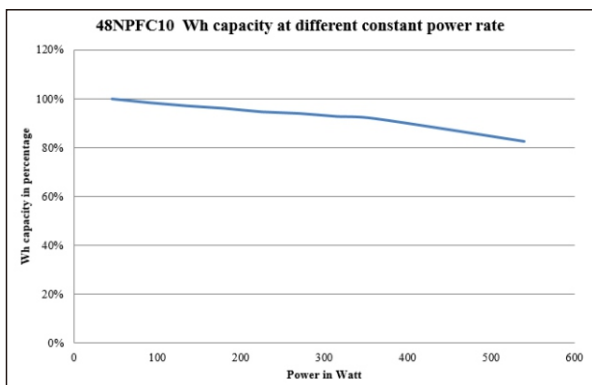

IEEE/UL Battery  
Sizing by  
**MooreU**  
610-952-6067  
www.mooreu.com

**NARADA POWER SOURCE CO.,LTD.**  
2F, Building B, No. 48 Zijinghua Road, Hangzhou, China  
Tel:+86-571-56975980/56975956 Fax:+86-571-56975955  
Website:www.naradapower.com E-mail: intl@narada.biz

**NARADA ASIA PACIFIC PTE.LTD.**  
65 Ubi Crescent #07-05 HOLA centre, Singapore  
Tel: +65-6848 1191 Fax: +65-6749 3498  
E-mail: sales@narada.com.sg

**NARADA EUROPE (UK) LIMITED**  
Spectrum House, Dunstable Road, Redbourn,  
St. Albans, Herts AL3 7PR  
Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031  
E-mail: sales@naradaeurope.com

