

Rechargeable lithium-ion battery

VL 34 P - high power cell

(Optimized for 1 C to 15 C continuous discharge or up to 70 C pulse power)



Benefits

- Excellent power density and specific power
- Power capability at cold temperature
- 100 % coulombic efficiency
- Hermetically-sealed cells
- Completely maintenance free
- Operates in any orientation
- Long cycle life:
 - 80% of initial capacity after 2,000 cycles at 100% DOD
 - 500,000 cycles during shallow cycling (~3% DOD)
- Projected 15 years calendar life for hybrid electric vehicle (HEV) application
- No memory effect
- Integral safety vent

Main applications

- Military hybrid electric vehicles
- High pulse power applications
- Defense

Key features

- Graphite-based anode
- Nickel alloy oxide-based cathode
- Sold only as assembled batteries
- Incorporating electronics for performance efficiency:
 - Charge/floating/discharge management
 - Cell balancing

Cell electrical characteristics

Nominal voltage	3.6 V
Nominal capacity at C rate at 4.1 V/2.5 V & 25° C	33 Ah
Maximum discharge current at 25° C:	
Continuous	500 + A
~2 s pulse	1900 A
~100 ms pulse	2400 A
Specific energy	120 Wh/Kg
Energy density ¹	280 Wh/l

Cell mechanical characteristics

Diameter max	54 mm
Height max ¹	195 mm
Mass max	0.94 kg
Volume max ¹	0.41 l

Cell operating conditions





Lower voltage limit for discharge:	
Continuous (- 20° C to + 45° C) pulse	2.5/2.0
Pulse	1.9
Charging method	Constant current/constant voltage (CCCV)
Charging voltage	4.1 ± 0.04
Recommended continuous charge current at C rate	C/2
Operating temperature:	
Charge	+ 5° C to + 35° C
Discharge	- 30° C to + 60° C
Storage and transportation temperature	- 40° C to + 65° C

¹Includes terminals

VL 34 P

Battery-level safety

- Incorporation of several levels of redundant safety features to prevent abuse conditions such as overcharge, over-discharge, and short circuit
- Battery protection controller at battery pack level
- CanProbe at module level
- Dual vents and shutdown separator at cell level

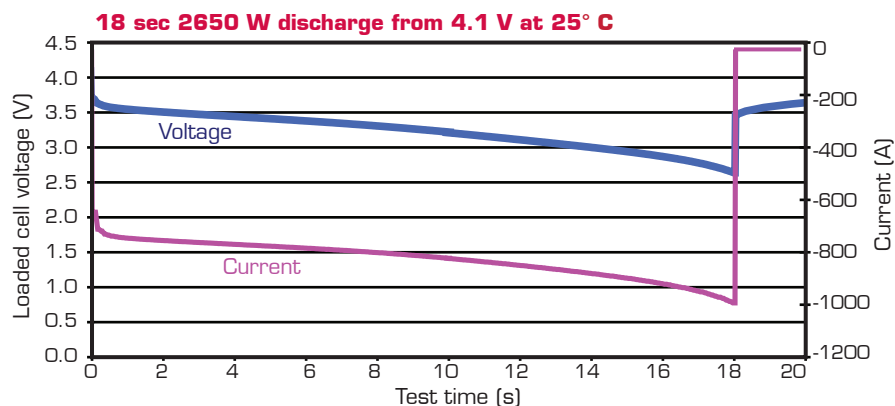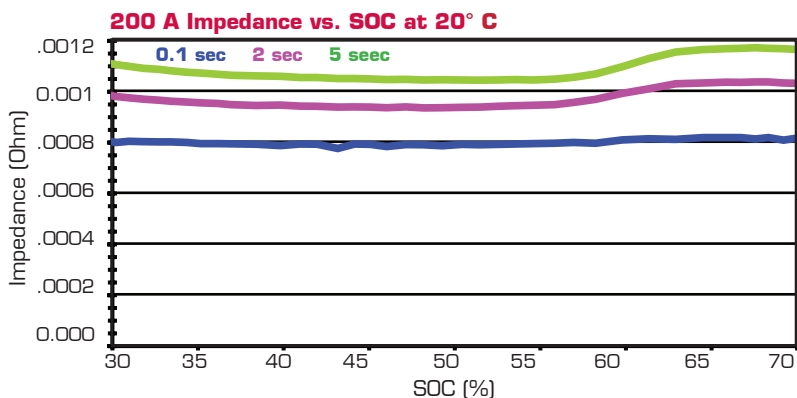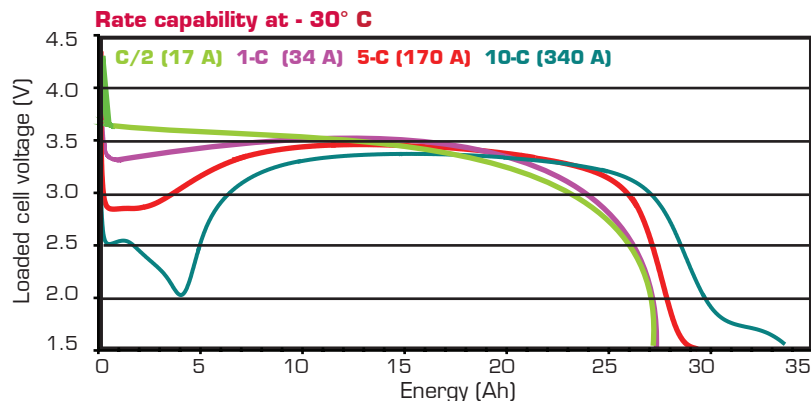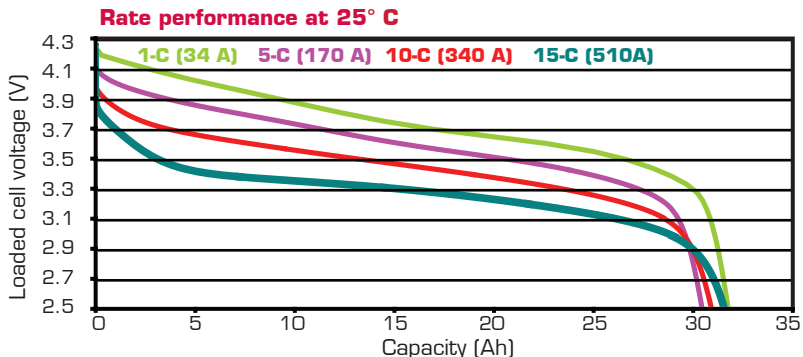

Saft America, Inc.
 Space & Defense Division
 107 Beaver Court
 Cockeysville, MD 21030 - USA
 Tel +1 410 771 3200
 Fax +1 410 771 1144

www.saftbatteries.com

Doc N° 32015-2-0607
 Edition: June 2007

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

Published by the Communications Department

Photo credit: Saft

Produced by Saft Space & Defense Division



SAFT