



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

Lithium Iron Phosphate Battery

V-LFP48V80Ah

IEEE/UL Battery
Sizing by
MooreU
610-952-6067
www.mooreu.com




Overview

Vision Technology provides safe lithium iron phosphate battery solutions for Telecom and Energy storage system. The V-LFP48V80Ah lithium iron phosphate battery system serves for Telecom and Energy storage system with perfect compatibility and long cycle life.

Features





- RS232,RS485 communication output for monitoring
- Built-in BMS with Charging current limitation
- Built-in automatic protection for over-charge, over-discharge and over-temperature conditions
- State of charge and state of health indication
- Built-in battery control for efficient operation
- Internal cell balancing
- Compatible with standard Telecom rectifiers and Energy storage system
- DO interface for customized dry contact signal
- PRO interface for upgrading BMS firmware
- Customized BMS functions and parameters
- Maintenance free

Battery Panel

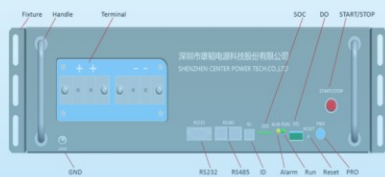

Battery Specification

Nominal Characteristics	
Nominal Voltage /V	48
Nominal Capacity /Ah (25° C , 0.2C)	80Ah
Mechanical characteristics	
Weight (approximate)/Kg	48 ± 0.4
Dimension L*W*H /mm	442*400*182
Terminal	DSTB22-2-2-M6
Electrical characteristics	
Working voltage range/V	42 to 54
Recommended charging voltage/V	53.5 to 54
Charging current limitation/A	Max.30A
Max. continue discharge current/A	50
Max. peak discharge current/A	55A for 30Sec.
Discharging Cut-off voltage/V	42
Operating conditions	
Cycle life (+20°C 0.2C 80%DOD)	≥4000 Cycles
Round trip efficiency(%)	>98%
Operating temperature	Discharge -30°C to 60°C Charge -20°C to 60°C
Storage temperature	-5°C to 55°C
Storage duration	12 months +20°C
Safety standard	UL1642 at cell level

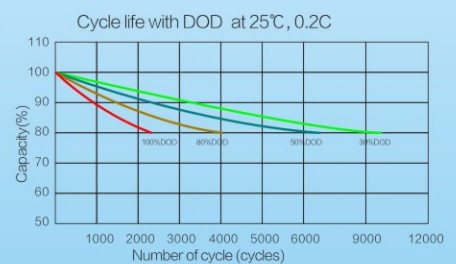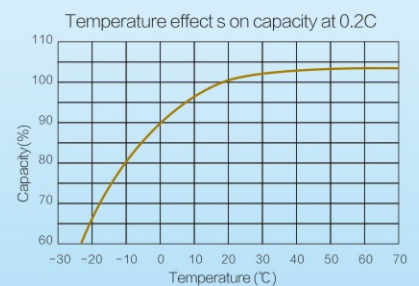

Vision provides all customized lithium battery solutions.