



# RA12-260(12V260Ah)

## Specification

<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Nominal Capacity</b>	260Ah@10hour-rate to 1.80V per cell @25°C
<b>Weight</b>	Approx. 74.0 Kg (Tolerance ± 1.5%)
<b>Internal Resistance</b>	Approx. 3.5 mΩ
<b>Terminal</b>	F14(M8)
<b>Max. Discharge Current</b>	2600A (5 sec)
<b>Short Circuit Current</b>	4810A
<b>Design Life</b>	12 years (Float charging)
<b>Recommended Maximum Charging Current</b>	78 A
<b>Reference Capacity</b>	C3 201.9AH C5 232.5AH C10 260.0AH C20 274.0AH
<b>Standby Use Voltage</b>	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
<b>Cycle Use Voltage</b>	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
<b>Operating Temperature Range</b>	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
<b>Normal Operating Temperature Range</b>	25°C ± 5°C
<b>Self Discharge</b>	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
<b>Container Material</b>	A.B.S. UL94-HB, UL94-V0 Optional.



RA series is a general purpose battery with 12 years design life in float service. It meets with IEC, JIS, BS and YDT standards. With advanced AGM valve regulated technology and high purity raw material, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



ISO 9001



ISO 14001



OHSAS 18001




MH 28539



G4M20206-0910-E-16

## Dimensions

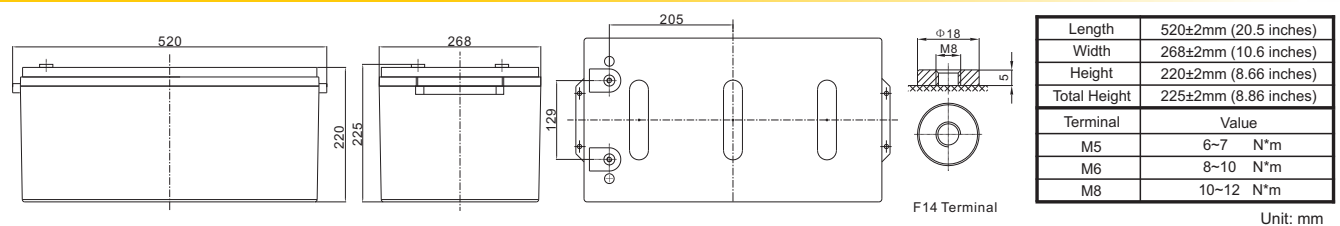

### Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	440.4	272.8	160.1	95.9	71.1	57.8	48.8	32.6	27.7	14.2
1.65V	428.9	266.8	157.1	94.5	70.2	57.1	48.2	32.3	27.5	14.1
1.70V	413.7	258.9	153.2	92.6	68.9	56.1	47.5	31.8	27.1	13.9
1.75V	393.9	248.5	148.0	90.2	67.3	54.8	46.5	31.2	26.6	13.7
1.80V	368.5	235.1	141.3	86.9	65.1	53.2	45.1	30.5	26.0	13.5
1.85V	336.5	217.9	132.6	82.7	62.2	51.0	43.4	29.4	25.2	13.1

### Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	781	503	304	184	138	113	95.4	64.6	55.3	28.4
1.65V	777	499	301	183	137	112	94.8	64.1	54.9	28.2
1.70V	756	487	295	180	135	110	93.5	63.4	54.2	28.0
1.75V	730	472	286	176	132	108	91.9	62.3	53.4	27.6
1.80V	693	451	275	171	128	105	89.6	60.9	52.2	27.1
1.85V	642	423	260	163	123	101	86.4	59.0	50.6	26.4

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


# RA12-260(12V260Ah)




## Discharge Characteristics Curve

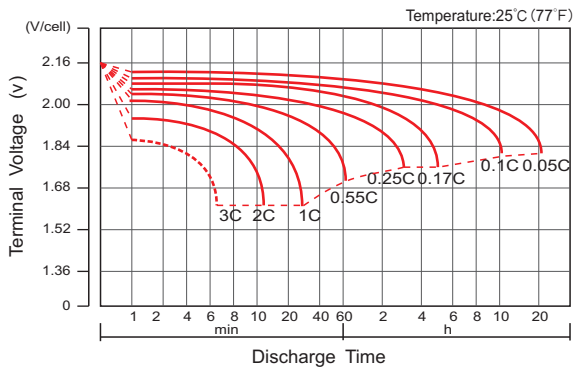


## Charge Characteristic Curve For Standby Use

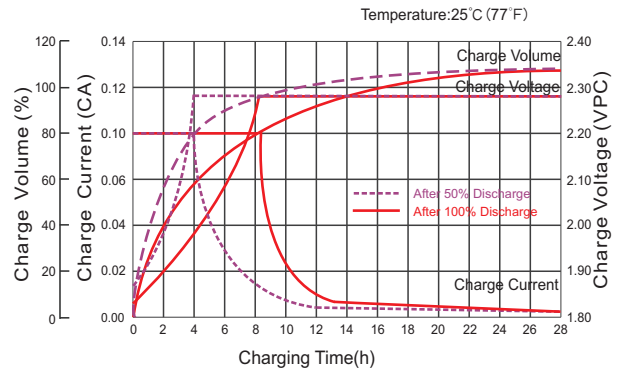


## Cycle Life In Relation To Depth Of Discharge

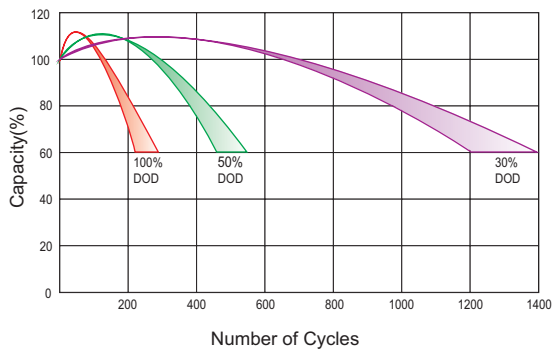


## Relationship Between Charging Voltage And Temperature

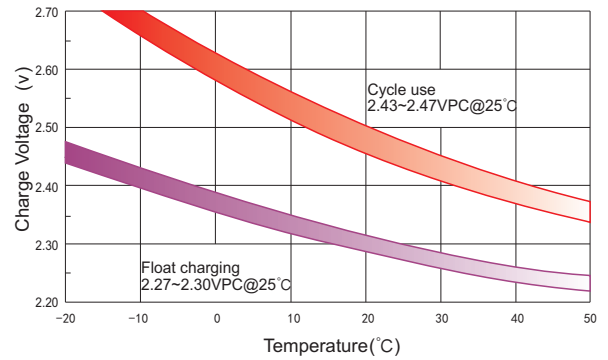


## Temperature Effects On Capacity

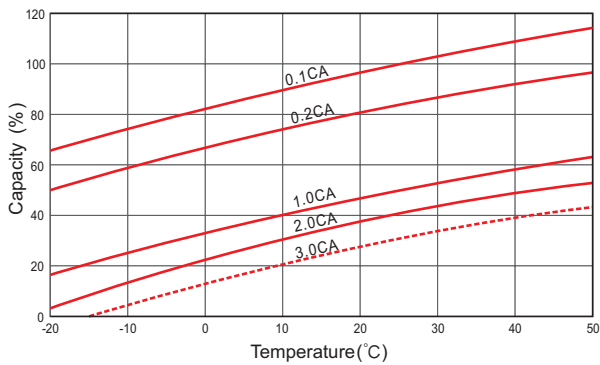


## Storage Characteristics

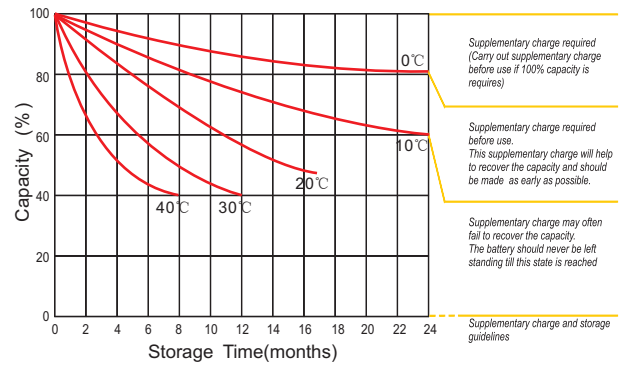

## Effect Of Temperature On Long Term Life

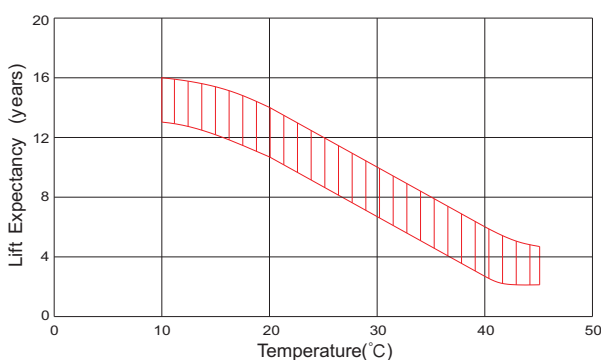

## Life Characteristics Of Standby Use

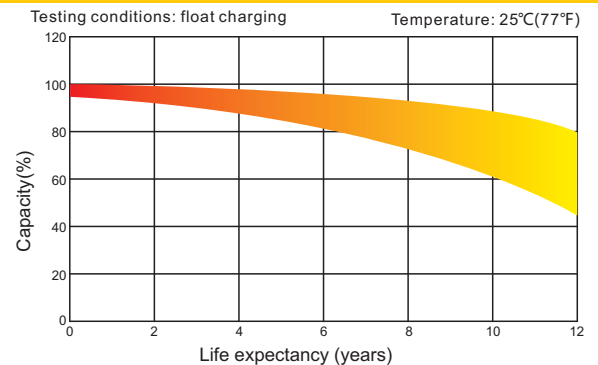

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:  
**Moore & Moore Solutions, Inc.**  
 Phone: 484-302-7009  
 Email: [mr@mooreu.com](mailto:mr@mooreu.com)  
[www.MooreU.com](http://www.MooreU.com)