

# FT12-55D (12V55Ah)



## Specification




FTD (Front Terminal Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharge. By using strong grids, thick plate and special active material are designed for repeated deep-discharge applications. The FTD series battery offers 30% more cyclic life than the standby series. And the dimensions are designed for 19" and 23" cabinet installation. It is suitable for telecom, solar and wind renewable energy storage, mobility and medical equipment, RV, telecom, broadband and cable TV, UPS systems etc.



<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Capacity</b>	55Ah@20hr-rate to 1.75V per cell @25°C
<b>Weight</b>	Approx. 18.0 Kg (Tolerance ±3%)
<b>Internal Resistance</b>	Approx. 6.0 mΩ
<b>Terminal</b>	F11(M6)
<b>Max. Discharge Current</b>	1000A (5 sec)
<b>Design Life</b>	15 years (floating charge)
<b>Maximum Charging Current</b>	16.5 A
<b>Reference Capacity</b>	C3 38.4AH C5 44.2AH C10 52.0AH C20 55.0AH
<b>Float Charging Voltage</b>	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
<b>Cycle Use Voltage</b>	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
<b>Operating Temperature Range</b>	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
<b>Normal Operating Temperature Range</b>	25°C ±5°C
<b>Self Discharge</b>	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
<b>Container Material</b>	A.B.S. UL94-HB, UL94-V0 Optional.

## Dimensions

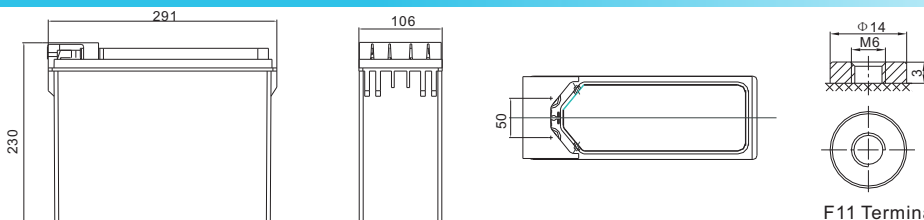

Length	291±2mm (11.5 inches)
Width	106±2mm (4.17 inches)
Height	230±2mm (9.06 inches)
Total Height	230±2mm (9.06 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

F11 Terminal

Unit: mm

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	91.5	53.5	31.4	18.8	13.5	11.0	9.28	6.33	5.54	2.84
1.65V	89.1	52.3	30.8	18.5	13.3	10.9	9.17	6.26	5.49	2.82
1.70V	85.9	50.8	30.0	18.2	13.1	10.7	9.03	6.18	5.42	2.79
1.75V	81.8	48.7	29.0	17.7	12.8	10.4	8.84	6.06	5.32	2.75
1.80V	76.6	46.1	27.7	17.0	12.4	10.1	8.59	5.91	5.20	2.70
1.85V	69.9	42.7	26.0	16.2	11.8	9.69	8.26	5.72	5.04	2.62

### Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	162.3	98.6	59.6	36.2	26.2	21.4	18.15	12.54	11.05	5.68
1.65V	161.4	97.9	59.1	35.9	26.0	21.3	18.03	12.45	10.97	5.65
1.70V	157.1	95.5	57.8	35.3	25.6	20.9	17.79	12.30	10.84	5.59
1.75V	151.7	92.6	56.1	34.5	25.1	20.6	17.47	12.09	10.66	5.52
1.80V	144.0	88.5	53.8	33.4	24.4	20.0	17.04	11.82	10.43	5.42
1.85V	133.3	82.9	50.9	32.0	23.4	19.25	16.44	11.45	10.12	5.28

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


# FT12-55D(12V55Ah)




## Discharge Characteristics Curve

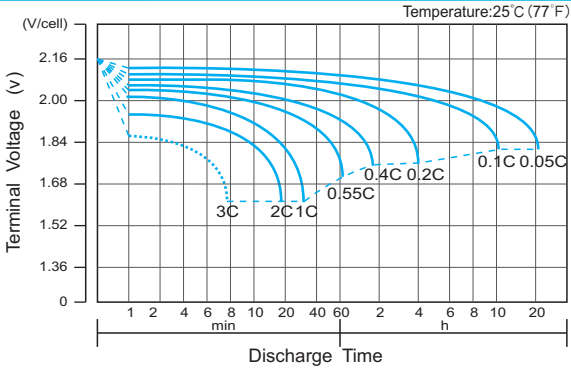


## Charge Characteristic Curve for Cycle Use(IU)

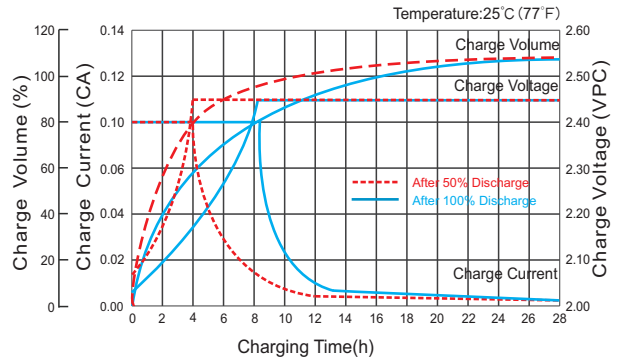


## Cycle Life in Relation to Depth of Discharge

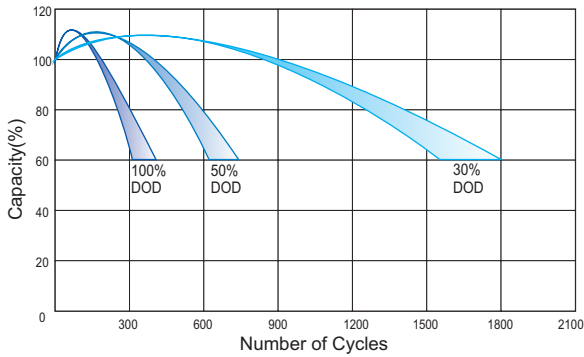


## Relationship Between Charging Voltage and Temperature

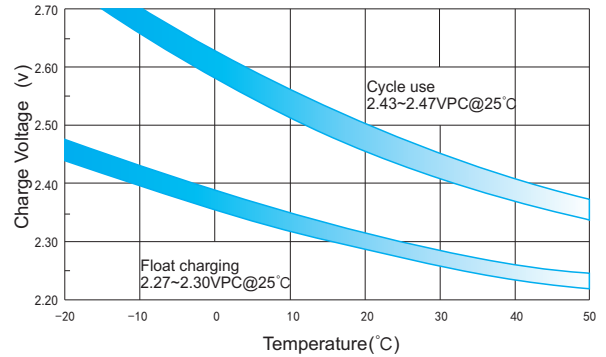


## Temperature Effects on Capacity

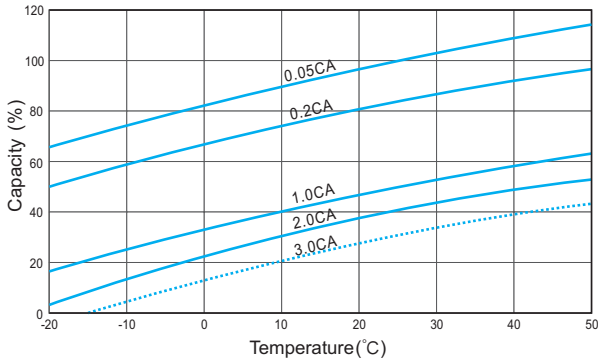


## Storage Characteristics

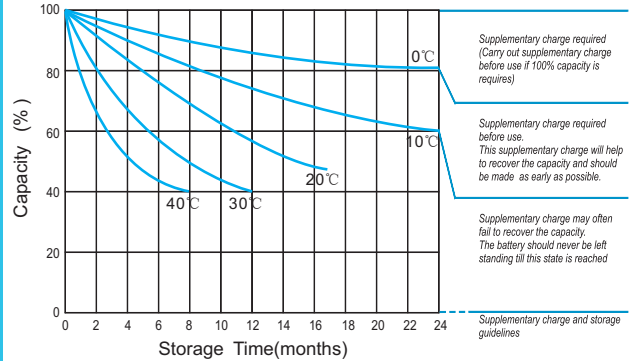

## Effect of Temperature on Long Term Life

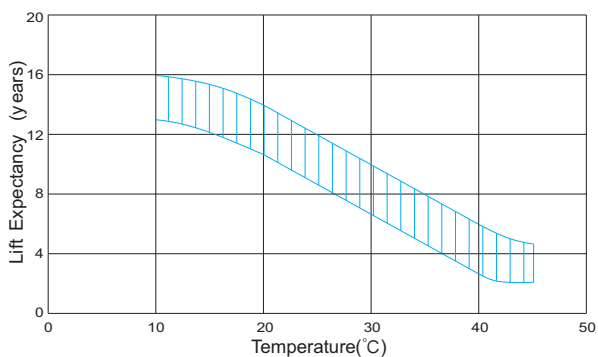

## Relationship of OCV And State of Charge(20°C)

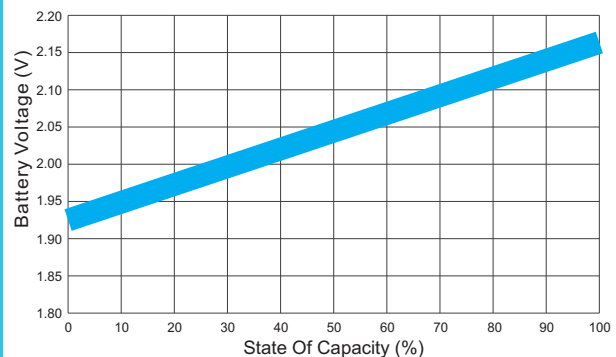

For Battery Sales + EPA Battery Recycling and AC / DC Power Services, please contact:  
**Moore & Moore Solutions, Inc.**  
 Phone: 484-302-7009  
 Email: [mr@mooreu.com](mailto:mr@mooreu.com)  
[www.MooreU.com](http://www.MooreU.com)